



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : A63B 59/00</p>	<p>A2</p>	<p>(11) International Publication Number: WO 99/51310</p> <p>(43) International Publication Date: 14 October 1999 (14.10.99)</p>
<p>(21) International Application Number: PCT/US99/07247</p> <p>(22) International Filing Date: 1 April 1999 (01.04.99)</p> <p>(30) Priority Data: 09/054,940 3 April 1998 (03.04.98) US</p> <p>(71) Applicant (for all designated States except US): ACTIVE CONTROL EXPERTS, INC. [US/US]; 215 First Street, Cambridge, MA 02142 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): SPANGLER, Ronald [US/US]; 8 Ashland Street, Somerville, MA 02144 (US). GILBERT, David [US/US]; Apartment #1, 38 Forest Street, Arlington, MA 02474 (US). PRESTIA, Carl [US/US]; 731 Great Road, Stow, MA 01775 (US). BIANCHINI, Emanuele [IT/US]; Apartment 2, 59 Elm Street, Charlestown, MA 02129 (US). LAZARUS, B., Kenneth [US/US]; 85 Revolutionary Road, Concord, MA 01742 (US). MOORE, Jeffrey, W. [US/US]; 58 Adams Street, Arlington, MA 02174 (US). JACQUES, Robert, N. [US/US]; 8 Tumbridge Lane, Hopkinton, MA 01748 (US). ALLEN, Jonathan, C. [US/US]; 11 Prince Street, Brookline, MA 02146 (US). RUSSO, Farla, M. [CA/US]; Apartment 2, 14 Warwick Road, Brookline, MA 02146 (US).</p>		<p>(74) Agent: CAMACHO, Jennifer, A.; Testa, Hurwitz & Thibault, LLP, High Street Tower, 125 High Street, Boston, MA 02110 (US).</p> <p>(81) Designated States: BR, CA, JP, KR, MX, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: BASEBALL BAT</p>		
<p>(57) Abstract</p> <p>A baseball bat includes an electroactive assembly attached near the handle and electrically tuned to capture energy from several modes with high efficiency. More generally, a sports implement includes an electroactive element, such as a piezoceramic sheet attached to the implement, and a circuit attached to the electroactive element. The circuit may be a shunt, or may include processing such as amplification and phase control to apply a driving signal which may compensate for strain sensed in the implement, or may simply alter the stiffness to affect performance. In a ski, the electroactive element is located near to the root in a region of high strain to apply damping, and the element captures between about one and five percent of the strain energy of the ski. The region of high strain may be found by modeling mechanics of the sports implement, or may be located by empirically mapping the strain distribution which occurs during use of the implement. In other embodiments, the electroactive elements may remove resonances, adapt performance to different situations, or enhance handling or comfort of the implement. Other embodiments include striking implements intended to hit a ball or object in play, such as mallets, golf clubs and tennis racquets, wherein the strain elements may alter the performance, feel or comfort of the implement. The electroactive elements may be configured in sets to capture energy in different modes, and/or along different directions.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

BASEBALL BAT

Background of the Invention

The present invention relates to sports equipment, and more particularly to damping, controlling vibrations and affecting stiffness of sports equipment, such as a racquet, ski, or the like. In general, a great many sports employ implements which are subject to either isolated extremely strong impacts, or to large but dynamically varying forces exerted over longer intervals of time or over a large portion of their body. Thus, for example, implements such as baseball bats, playing racquets, sticks and mallets are each subject very high intensity impact applied to a fixed or variable point of their playing surface and propagating along an elongated handle that is held by the player. With such implements, while the speed, performance or handling of the striking implement itself maybe relatively unaffected by the impact, the resultant vibration may strongly jar the person holding it. Other sporting equipment, such as sleds, bicycles or skis, may be subjected to extreme impact as well as to diffuse stresses applied over a protracted area and a continuous period of time, and may evolve complex mechanical responses thereto. These responses may excite vibrations or may alter the shape of runners, frame, or chassis structures, or other air- or ground-contacting surfaces. In this case, the vibrations or deformations have a direct impact both on the degree of control which the driver or skier may exert over his path of movement, and on the net speed or efficiency of motion achievable therewith.

Taking by way of example the instance of downhill or slalom skis, basic mechanical considerations have long dictated that this equipment be formed of flexible yet highly stiff material having a slight curvature in the longitudinal and preferably also in the traverse directions. Such long, stiff plate-like members are inherently subject to a high degree of ringing and structural vibration, whether they be constructed of metal, wood, fibers, epoxy or some composite or combination thereof. In general, the location of the skier's weight centrally over the middle of the ski provides a generally fixed region of contact with the ground so that very slight changes in the skier's posture and weight-bearing attitude are effective to bring the various edges and running surfaces of the ski into optimal skiing positions with respect to the underlying terrain. This allows control of steering and travel speed, provided that the underlying snow or ice has sufficient amount of yield and the travel velocity remains sufficiently low. However, the extent of flutter and vibration arising at higher speeds and on irregular, bumpy, icy surfaces can seriously degrade performance. In particular, mechanical vibration leads to an increase in the apparent frictional forces or net drag exerted against the ski by the underlying surface, or may even lead to a loss of control when blade-like edges are displaced so much that they fail to contact the ground. This

- 2 -

problem particularly arises with modern skis, and analogous problems arise with tennis racquets and the like made with metals and synthetic materials that may exhibit much higher stiffness and elasticity than wood.

5 In general, to applicant's knowledge, the only practical approach so far developed for preventing vibration from arising has been to incorporate in a sports article such as a ski, an inelastic material which adds damping to the overall structure or to provide a flexible block device external to the main body thereof. Because of the trade-offs in weight, strength, stiffness and flexibility that are inherent in the approach of adding inelastic elements onto a ski, it is highly desirable to develop other, and improved, methods and structures for vibration control. In
10 particular, it would be desirable to develop a vibration control of light weight, or one that also contributes to structural strength and stiffness so it imposes little or no weight penalty. Other features which would be beneficial include a vibration control structure having broad bandwidth, small volume, ruggedness, and adaptability.

15 The limitations of the vibrational response of sports implements and equipment other than skis or sleds are somewhat analogous, and their interactions with the environment or effect on the player may be understood, *mutatis mutandi*. It would be desirable to provide a general solution to the vibrational problem of a sports article. Accordingly, there is a great need for a sports damper.

20 It should be noted that in the field of advanced structural mechanics, there has been a fair amount of research and experimentation on the possibility of controlling thin structural members, such as airfoils, trusses of certain shapes, and thin skins made of advanced composite or metal material, by actuation of piezoelectric sheets embedded in or attached to these structures. However, such studies are generally undertaken with a view toward modeling an effect achievable with the piezo actuators when they are attached to simplified models of mechanical structures and
25 to specialized driving and monitoring equipment in a laboratory.

In such cases, it is generally necessary to assure that the percentage of strain energy partitioned into the piezo elements from the structural model is relatively great; also in these circumstances, large actuation signals may be necessary to drive the piezo elements sufficiently to achieve the desired control. Furthermore, since the most effective active strain elements are
30 generally available as brittle, ceramic sheet material, much of this research has required that the actuators be specially assembled and bonded into the test structures, and be protected against extreme impacts or deformations. Other, less brittle forms of piezo-actuated material are available in the form of polymeric sheet material, such as PVDF. However, this latter material, while not brittle or prone to cracking is capable of producing only relatively low mechanical
35 actuation forces. Thus, while PVDF is easily applied to surfaces and may be quite useful for strain sensors, its potential for active control of a physical structure is limited. Furthermore, even

- 3 -

for piezoceramic actuator materials, the net amount of useful strain is limited by the form of attachment, and displacement introduced in the actuator material is small.

All of the foregoing considerations would seem to preclude any effective application of piezo elements to enhance the performance of a sports implement.

5 Nonetheless, a number of sports implements remain subject to performance problems as they undergo displacement or vibration, and are strained during normal use. While modern materials have achieved lightness, stiffness and strength, these very properties may exacerbate vibrational problems. It would therefore be desirable to provide a general construction which reduces or compensates for undesirable performance states, or prevents their occurrence in actual
10 use of a sports implement.

Summary of the Invention

These and other desirable results are achieved in a sports damper in accordance with the present invention wherein all or a portion of the body of a piece of sporting equipment has mounted thereto an electroactive assembly which couples strain across a surface of the body of
15 the sporting implement and alters the damping or stiffness of the body in response to strain occurring in the implement in the area where the assembly is attached. Electromechanical actuation of the assembly adds or dissipates energy, effectively damping vibration as it arises, or alters the stiffness to change the dynamic response of the equipment. The sporting implement is characterized as having a body with a root and one or more principal structural modes having
20 nodes and regions of strain. The electroactive assembly is generally positioned near the root, to enhance or maximize its mechanical actuation efficiency. The assembly may be a passive component, converting strain energy to electrical energy and shunting the electrical energy, thus dissipating energy in the body of the sports implement. In an active embodiment, the system includes an electroactive assembly with piezoelectric sheet material and a separate power source
25 such as a replaceable battery. The battery is connected to a driver to selectively vary the mechanics of the assembly. In a preferred embodiment, a sensing member in proximity to the piezoelectric sheet material responds to dynamic conditions of strain occurring in the sports implement and provides output signals for which are amplified by the power source for actuation of the first piezo sheets. The sensing member is positioned sufficiently close that nodes of lower
30 order mechanical modes do not occur between the sensing member and control sheet. In a further embodiment, a controller may include logic or circuitry to apply two or more different control rules for actuation of the sheet in response to the sensed signals, effecting different actuations of the first piezo sheet.

One embodiment is a ski in which the electroactive assembly is surface bonded to or
35 embedded within the body of the ski at a position a short distance ahead of the effective root location, the boot mounting. In a passive embodiment, the charge across the piezo elements in

- 4 -

the assembly is shunted to dissipate the energy of strain coupled into the assembly. In another embodiment, a longitudinally-displaced but effectively collocated sensor detects strain in the ski, and creates an output signal which is used as input or control signal to actuate the first piezo sheet. A single 9-volt battery powers an amplifier for the output signal, and this arrangement
5 applies sufficient power for up to a day or more to operate the electroactive assembly as an active damping or stiffening control mechanism, shifting or dampening resonances of the ski and enhancing the degree of ground contact and the magnitude of attainable speeds. In other sports implements the piezoelectric element may attach to the handle or head of a racquet or striking implement to enhance handling characteristics, feel and performance.

10 Brief Description of the Drawings

These and other features of the invention will be understood from the description contained herein taken together with the illustrative drawings, wherein

FIGURE 1 shows a ski in accordance with the present invention;

FIGURE 1A and 1C show details of a passive damper embodiment of the ski of FIGURE
15 1;

FIGURE 1B shows an active embodiment thereof;

FIGURE 1D shows another ski embodiment of the invention;

FIGURES 2A-2C shows sections through the ski of FIGURE 1;

FIGURE 3 schematically shows a circuit for driving the ski of FIGURE 1B;

FIGURE 4 models energy ratio for actuators of different lengths;
20

FIGURE 5 models strain transfer loss for a glued-on actuator assembly;

FIGURE 5A illustrates one strain actuator placement in relation to strain magnitude;

FIGURE 6 shows damping achieved with a passive shunt embodiment;

FIGURE 6A illustrates the actuator assembly for the embodiment of FIGURE 6;

FIGURES 7(a)-7(j) show general actuator/sensor configurations adapted for differently
25 shaped sports implements;

FIGURE 8 shows an actuator/circuit/sensor layout in a prototype active embodiment; and

- 5 -

FIGURES 8A and 8B show top and sectional views of the assembly of FIGURE 8 mounted in a ski;

FIGURE 9 shows a golf club embodiment of the invention;

FIGURE 9A illustrates strain characteristics thereof;

5 FIGURE 9B shows details thereof in sectional view;

FIGURE 9C shows a baseball bat embodiment of the invention;

FIGURE 10 shows a racquet embodiment of the invention;

FIGURE 10A illustrates strain characteristics thereof;

10 FIGURE 11 shows a javelin embodiment of the invention and illustrates strain characteristics thereof;

FIGURE 12 shows a ski board embodiment of the invention;

FIGURES 13A and 13B illustrate baseball bat response characteristics;

FIGURE 14 shows a baseball bat damper construction of the invention;

FIGURE 14A illustrates details of a preferred embodiment thereof; and

15 FIGURE 15 shows added damping achieved over a modal region of the bat.

Detailed Description

FIGURE 1 shows by way of example, as an illustrative sports implement, a ski 10 embodying the present invention. Ski 10 has a generally elongated body 11, and mounting portion 12 centrally located along its length, which, for example, in a downhill ski includes one or more ski-boot support plates affixed to its surface, and heel and toe safety release mechanisms (not shown) fastened to the ski behind and ahead of the boot mounting plates, respectively. These latter elements are all conventional, and are not illustrated. It will be appreciated, however, that these features define a plate-mechanical system wherein the weight of a skier is centrally clamped on the ski, and makes this central portion a fixed point (inertially, and sometimes to ground) of the structure, so that the mounting region generally is, mechanically speaking, a root of a plate which extends outwardly therefrom along an axis in both directions. As further illustrated in FIGURE 1, ski 10 of the present invention has an electroactive assembly 22 integrated with the ski or affixed thereto, and in some embodiments, a sensing sheet element 25

- 6 -

communicating with the electroactive sheet element. and a power controller 24 in electrical communication with both the sensing and the electroactive sheet elements.

5 In accordance with applicant's invention, the electroactive assembly and sheet element within are strain-coupled either within or to the surface of ski, so that it is an integral part of and provides stiffness to the ski body, and responds to strain therein by changing its state to apply or to dissipate strain energy, thus controlling vibrational modes of the ski and its response. The electroactive sheet elements 22 are preferably formed of piezoceramic material, having a relatively high stiffness and high strain actuation efficiency. However, it will be understood that the total energy which can be coupled through such an actuator, as well as the power available for
10 supplying such energy, is relatively limited both by the dimensions of the mechanical structure and available space or weight loading, and other factors. Accordingly, the exact location and positioning as well as the dimensioning and selection of suitable material is a matter of some technical importance both for a ski and for any other sports implement, and this will be better understood from the discussion below of specific factors to consider in implementing this sports
15 damper in a ski.

By way of general background, a great number of investigations have been performed regarding the incorporation of thin piezoceramic sheets into stiff structures built up, for example, of polymer material. In particular, in the field of aerodynamics, studies have shown the feasibility of incorporating layers of electroactive material within a thin skin or shell structure to control the
20 physical aspect or vibrational states of the structure. U.S. Patents 4,849,648 and 5,374,011 of one or more of the present inventors describe methods of working with such materials, and refer to other publications detailing theoretical and actual results obtained this field.

More recently, applicants have set out to develop and have introduced as a commercial product packaged electroactive assemblies, in which the electroactive material, consisting of one
25 or more thin brittle piezoceramic sheets, is incorporated into a card which may in turn be assembled in or onto other structures to efficiently apply substantially all of the strain energy available in the actuating element. Applicant's published international patent application PCT publication WO 95/20827 describes the fabrication of a thin stiff card with sheet members in which substantially the entire area is occupied by one or more piezoceramic sheets, and which
30 encapsulates the sheets in a manner to provide a tough supporting structure for the delicate member yet allow its in-plane energy to be efficiently coupled across its major faces. That patent application and the aforementioned U.S. Patents are hereby incorporated herein by reference for purposes of describing such materials, the construction of such assemblies, and their attachment to or incorporation into physical objects. Accordingly, it will be understood in the discussion
35 below that the electroactive sheet elements described herein are preferably substantially similar or identical to those described in the aforesaid patent application, or are elements which are

- 7 -

embedded in, or supported by sheet material as described therein such that their coupling to the skis provides a non-lossy and highly effective transfer of strain energy therebetween across a broad area actuator surface.

FIGURE 1A illustrates a basic embodiment of a sports implement 50' in accordance with applicant's invention. Here a single sensor/actuator sheet element 56 covers a root region R' of the ski and its strain-induced electrical output is connected across a shunt loop 58. Shunt loop 58 contains a resistor 59 and filter 59' connected across the top and bottom electrodes of the actuator 56, so that as strain in the region R creates charge in the actuator element 56, the charge is dissipated. The mechanical effect of this construction is that strain changes occurring in region R' within the band of filter 59' are continuously dissipated, resulting, effectively, in damping of the modes of the structure. The element 56 may cover five to ten percent of the surface, and capture up to about five percent of the strain in the ski. Since most vibrational states actually take a substantial time period to build up, this low level of continuous mechanical compensation is effective to control serious mechanical effects of vibration, and to alter the response of the ski.

In practice, the intrinsic capacitance of the piezoelectric actuators operates to effectively filter the signals generated thereby or applied thereacross, so a separate filter element 59' need not be provided. In a prototype embodiment, three lead zirconium titanate (PZT) ceramic sheets PZ were mounted as shown in FIGURE 1C laminated to flex circuit material in which corresponding trellis-shaped conductive leads C spanned both the upper and lower electroded surfaces of the PZT plates. Each sheet was 1.81 by 1.31 by 0.058 inches, forming a modular card-like assembly approximately 1.66 x 6.62 inches and 0.066 inches thick. The upper and lower electrode lines C extend to a shunt region S at the front of the modular package, in which they are interconnected via a pair of shunt resistors so that the charge generated across the PZT elements due to strain in the ski is dissipated. The resistors are surface-mount chip resistors, and one or more surface-mount LED's are connected across the leads to flash as the wafers experience strain and shunt the energy thereof. This provides visible confirmation that the circuit lines remain connected. The entire packaged assembly was mounted on the top structural surface layer of a ski to passively couple strain out of the ski body and continuously dissipate that strain. Another prototype embodiment employs four such PZT sheets arranged in a line.

FIGURE 1B illustrates another general architecture of a sports implement 50 in accordance with applicant's invention. In this embodiment a first strain element 52 is attached to the implement to sense strain and produce a charge output on line 52a indicative of that strain in a region 53 covering all or a portion of a region R, and an actuator strain element 54 is positioned in the region R to receive drive signals on line 54a and couple strain into the sports implement over a region 55. Line 52a may connect directly to line 54a, or may connect via intermediate signal conditioning or processing circuitry 58', such as amplification, phase inversions, delay or

integration circuitry, or a microprocessor. As with the embodiment of FIGURE 1A, the amount of strain energy achievable by driving the strain element 54 may amount of only a small percentage, e.g., one to five percent, of the strain naturally excited in use of the ski, and this effect might not be expected to result in an observable or useful change in the response of a sports implement. Applicant has found, however that proper selection of the region R and subregions 53 and 55 several effective controls are achieved. A general technique for identifying and determining locations for these regions in a sports implement will be discussed further below.

As further shown in FIGURE 1D, other embodiments of an adaptive ski may be implemented having electroactive assemblies 22 located in several regions, both ahead of and behind the root area. This allows a greater portion of the strain energy to be captured, and dissipated or otherwise affected.

In general, the amount of strain which can be captured from or applied to the body of the ski will depend on the size and location of the electroactive assemblies, as well as their coupling to the ski. FIGURE 5A illustrates strain and displacement along the length of a ski as a function of distance L from the root to the tip. A corresponding construction for the electroactive assembly is illustrated, and shows between one and three layers of strain actuator material PZ, with a greater number of layers in the regions of higher strain. In practice, rather than such a tailored construction, applicant has found that it is adequate to position a relatively short assembly-six or eight inches long-in a region of high strain, where the assembly has a constant number of piezo layers along its length. In prototype embodiments, applicant employed a one-layer assembly for the passive (shunted) damper, and a three-layer assembly for the actively driven embodiment. Such electroactive assemblies of uniform thickness are more readily fabricated in a heated lamination press to withstand extreme physical conditions.

Returning now to the ski shown in FIGURE 1, various sections are shown in FIGURES 2A-2C through the forepart of that ski illustrating the cross sectional structure therein. Two types of structures appear. The first are structures forming the body, including runners and other elements, of the ski itself. All of these elements are entirely conventional and have mechanical properties and functions as known in the prior art. The second type of element are those forming or especially adapted to the electroactive sheet elements which are to control the ski. These elements, including insulating films spacers, support structures, and other materials which are laminated about the piezoelectric elements preferably constitute modular or packaged piezo assemblies which are identical to or similar to those described in the aforesaid patent application documents. Advantageously, the latter elements together form a mechanically stiff but strong and laminated flexible sheet. As such they are incorporated into the ski with its normal stiff epoxy or other body material thereof, forming an integral part of the ski body and thereby avoiding any increased weight or performance penalty or loss of strength, while providing the capability for

electrical control of the ski's mechanical parameters. This property will be understood with reference to FIGURES 2A-2C.

FIGURE 2A shows a section through the forepart of ski 11, in a region where no other mounting or coupling devices are present. The basic ski construction includes a hard steel runner assembly 31 which extends along each side of the ski, and an aluminum edge bead 32 which also extends along each side of the ski and provides a corner element at the top surface thereof. Edge bead 32 may be a portion of an extrusion having projecting fingers or webs 32a which firmly anchor and position the bead 32 in position in the body of the ski. Similarly, the steel runner 31 may be attached to or formed as part of a thin perforated sheet structure 31a or other metal form having protruding parts which anchor firmly within the body of the skis. The outside edge of the extrusion 32 is filled with a strong non-brittle flowable polymer 33 which serves to protect the aluminum and other parts against weathering and splitting, and the major portion of the body of the ski is filled one or more laminations of strong structural material 35 which may comprise layers of kevlar or similar fabric, fibers of kevlar material, and strong cross-linkable polymer such as an epoxy, or other structural material known in the art for forming the body of the ski. This material 35 generally covers and secures the protruding fingers 32a of the metal portion running around the perimeter of the ski. The top of the ski has a layer of generally decorative colored polymer material 38 of low intrinsic strength but high resistance to impact which covers a shallow layer and forms a surface finish on the top of the ski. The bottom of the ski has a similar filled region 39 formed of a low friction polymer having good sliding qualities on snow and ice. In general, the runner 31, edging 32 and structural material 35 form a stiff strong longitudinal plate which rings or resonates strongly in a number of modes when subjected to the impacts and lateral scraping contact impulses of use.

FIGURE 2B shows a section taken at position more centrally located along the body of the ski. The section here differs, other than in the slight dimensional changes due to tapering of the ski along its length, in also having an electroactive assembly element 22 together with its supply or output electrode material 22a in the body of the ski. As shown in the FIGURE, the electroactive assembly 22 is embedded below the cover layer 38 of the ski in a recess 28 so that they contact the structural layer 35 over a broad contact area and are directly coupled thereto with an essentially sheer-free coupling. The electrodes connected to the assembly 22 also lie below the surface; this assures that the electroactive assembly is not subject to damage when the skier crosses his skis or otherwise scrapes the top surface of the ski. Furthermore, by placing the element directly in contact with or embedded in the internal structural layer 35, a highly efficient coupling of strain energy thereto is obtained. This provides both a high degree of structural stiffness and support, and the capability to efficiently alter dynamic properties of the ski as a whole. As noted above, in some ski constructions layer 38 tends to be less hard and such a layer 38 would therefore dissipate strain energy that was surface coupled to it without affecting ski

mechanics. However, where the top surface is also a stiff polymer, such as a glass/epoxy material, the actuator can be directly cemented to the top surface.

FIGURE 2C shows another view through the ski closer to the root or central position thereof. This view shows a section through the power module 24, which is mounted on the surface of the ski, as well as through the sensor 25, which like element 22 is preferably below the surface thereof. As shown, the control or power module 24 includes a housing 41 mounted on the surface and a battery 40 and circuit elements 26 optionally therein, while the electroactive sensor 25 is embedded below the surface, i.e., below surface layer 38, in the body of the ski to detect strain occurring in the region. The active circuit elements 26 may include elements for amplifying the level of signal provided to the actuator and processing elements, for phase-shifting, filtering and switching, or logic discrimination elements to actively apply a regimen of control signals determined by a control law to the electroactive elements 25. In the latter case, all or a portion of the controller circuitry may be distributed in or on the actuator or sensing elements of the electroactive assembly itself, for example as embedded or surface mounted amplifying, shunting, or processing elements as described in the aforesaid international patent application. The actuator element is actuated either to damp the ski, or change its dynamic stiffness, or both. The nature and effect of this operation will be understood from the following.

To determine an effective implementation--to choose the size and placement for active elements as well as their mode of actuation--the ski may first modeled in terms of its geometry, stiffness, natural frequencies, baseline damping and mass distribution. This model allows one to derive a strain energy distribution and determine the mode shape of the ski itself. From these parameters one can determine the added amount of damping which may be necessary to control the ski. By locating electroactive assemblies at the regions of high strain, one can maximize the percentage of strain energy which is coupled into a piezoceramic element mounted on the ski for the vibrational modes of interest. In general by covering a large area with strain elements, a large portion of the strain energy in the ski can be coupled into the electroactive elements. However, applicant has found it sufficient in practice to deal with lower order modes, and therefore to cover less than fifty percent of the area forward of toe area with actuators. In particular, from the strain energy distribution of the modes of concern, for example the first five or ten vibrational modes of the ski structure, the areas of high strain may be determined. The region for placement of the damper is then selected based on the strain energy, subject to other allowable placement and size constraints. The net percent of strain energy in the damper may be calculated from the following equation:

$$\%SE_d = (EI_d/EI_s) * \%SE_s(\text{in damper region}) * \beta \quad (1)$$

By multiplying this number by the damping factor of the electroactive assembly configured for damping, the damping factor for the piece of equipment is found.

- 11 -

$$\eta_s = \eta_d * \%SE_d \quad (2)$$

The other losses β are a function of (a) the relative impedance of the piece of equipment and the damper $[EI_d/EI_s]$ and (b) the thickness and strength of the bonding agent used to attach the damper. Applicant has calculate impedance losses using FEA models, and these are due to the redistribution of the strain energy which results when the damper is added. A loss chart for a typical application is shown in FIGURE 3. Bond losses are due to energy being absorbed as shear energy in the bond layers between actuator and ski body, and are found by solving the differential equation associated with strain transfer through material with significant shearing. The loss is equal to the strain loss squared and depends on geometric parameters as shown in FIGURE 4. The losses β have the effect of requiring the damper design to be distributed over a larger area, rather than simply placing the thickest damper on the highest strain area. This effect is shown in FIGURE 5.

The damping factor of the damper depends on its dissipation of strain energy. In the passive construction of FIGURE 1A, dissipation is achieved with a shunt circuit attached to the electroactive elements. Typically, the exact vibrational frequencies of a sports implement are not known or readily observable due to the variability of the human using it and the conditions under which it is used, so applicant has selected a broad band passive shunt, as opposed to a narrow band tuned-mass-damper type shunt. The best such shunt is believed to be just a resistor tuned in relation to the capacitance of the piezo sheet, to optimize the damping in the damper near the specific frequencies associated with the modes to be damped. The optimal shunt resistor is found from the vibration frequency and capacitance of the electroactive element as follows:

$$R_{opt} = al * (1/(\omega c)) \quad (3)$$

where the constant al depends on the coupling coefficient of the damping element.

In a prototype employing a piezoceramic damper module as described in the above-referenced patent application, the shunt circuit is connected to the electroactive elements via flex-circuits which, together with epoxy and spacer material, form an integral damper assembly. Preferably an LED is placed across the actuator electrodes, or a pair of LEDs are placed across legs of a resistance bridge to achieve a bipolar LED drive at a suitable voltage, so that the LED flashes to indicate that the actuator is strained and shunting, i.e., that the damper is operating. This configuration is shown in FIGURE 1A by LED 70.

In general, when an LED indicator is connected, typically through a current-limiting resistor, to the electrodes contacting one or more of piezoceramic plates in the damper assembly, the LED will light up when there is strain in the plates. Thus, as an initial matter, illumination of the LED indicates that the piezo element electrodes remain attached, demonstrating the integrity of the piezo vibration control module. The LED will flash ON and OFF at the frequency of the

- 12 -

disturbance that the ski is experiencing; in addition, its brightness indicates the magnitude of the disturbance. In typical ski running conditions—that is when the terrain varies and there are instants of greater or lesser energy coupling and build-up in the ski, the amount of damping imparted to the ski is discernible by simply observing the amount of time it takes for the LED illumination to decay. The sooner the light stops flashing, the higher the level of damping. Damage to the module is indicated if the LED fails to illuminate when the ski is subject to a disturbance, and particular defects, such as a partially-broken piezo plate, may be indicated by a light output that is present, but weak. A break in the electrical circuit can be deduced when the light intermittently fails to work, but is sometimes good. Other conditions, such as loss of a fundamental mode indicative of partial internal cracking of the ski or implement, or shifting of the spectrum indicative of loosening or aging of materials, may be detected.

In addition to the above indications provided by the LED illumination, which apply to many sports implement embodiments of the invention, the LED in a ski embodiment may provide certain other useful information or diagnostics of skiing conditions or of the physical condition of the ski itself. Thus, for instance, when skiing on especially granular hard chop, the magnitude and type of energy imparted to the ski—which a skier generally hears and identifies by its loud white noise "swooshing" sound—may give rise to particular vibrations or strain identifiable by a visible low-frequency blinking, or a higher frequency component which, although its blink rate is not visible, lies in an identifiable band of the power spectrum. In this case, the ski conditions may all be empirically correlated with their effects on the strain energy spectrum and one or more band pass filters may be provided at the time of manufacture, connected to LEDs that light up specifically to indicate the specific snow condition. Similarly, a mismatch between snow and the ski running surface may result in excessive frictional drag, giving rise, for example, to Rayleigh waves or shear wave vibrations which are detected at the module in a characteristic pattern (e.g. a continuous high amplitude strain) or frequency band. In this case by providing an appropriate filter to pass this output to an LED, the LED indicates that a particular remedial treatment is necessary—e.g. a special wax is necessary to increase speed or smoothness. The invention also contemplates connecting the piezo to a specific LED via a threshold circuit so that the LED lights up only when a disturbance of a particular magnitude occurs, or a mode is excited at a high amplitude.

A prototype embodiment of the sports damper for a downhill ski as shown in FIGURE 1A was constructed. Damping measurements on the prototype, with and without the damper, were measured as shown in FIGURE 6. The damper design added only 4.2% in weight to the ski, yet was able to add 30% additional damping. The materials of which the ski was manufactured were relatively stiff, so the natural level of damping was below one percent. The additional damping due to a shunted piezoelectric sheet actuator amounted to about one-half to one percent damping, and this small quantitative increase was unexpectedly effective to decrease vibration and provide

- 13 -

greater stability of the ski. The aforesaid design employed electroactive elements over approximately 10% of the ski surface, with the elements being slightly over 1/16th of an inch thick, and, as noted, it increased the level of damping by a factor of approximately 30%. This embodiment did not utilize a battery power pack, but instead employed a simple shunt resistance to passively dissipate the strain energy entering the electroactive element. FIGURE 6A shows the actuator layout with four 1 1/4" x 2" sheets attached to the toe area.

A prototype of the active embodiment of the invention was also made. This employed an active design in which the element could be actuated to either change the stiffness of the equipment or introduce damping. The former of these two responses is especially useful for shifting vibrational modes when a suitable control law has been modeled previously or otherwise determined, for effecting dynamic compensation. It is also useful for simply changing the turning or bending resistance, e.g. for adapting the ski to perform better slalom or mogul turns, or alternatively grand slalom or downhill handling. The active damper employed a battery power pack as illustrated in FIGURES 1B and 2, and utilized a simply 9-volt battery which could be switched ON to power the circuitry. Overall the design was similar to that of the passive damper, with the actuator placed in areas of high strain for the dynamic modes of interest. Typically, only the first five or so structural modes of the ski need be addressed, although it is straightforward to model the lowest fifteen or twenty modes. Impedance factors and shear losses enter into the design as before, but in general, the size of actuators is selected based on the desired disturbance force to be applied rather than the percent of strain energy which one wishes to capture, taking as a starting point that the actuator will need enough force to move the structure by about fifty percent of the motion caused by the average disturbance (i.e., to double the damping or stiffness). The actuator force can be increased either by using a greater mass of active piezo material, or by increasing the maximum voltage generated by the drive amplifier. Thus there is a trade-off in performance with power consumption or with the mass of the electroactive material. Rather than achieve full control, applicant therefore undertook to optimize the actuator force in this embodiment, subject to practical considerations of size, weight, battery life and cost constraints. This resulted in a prototype embodiment of the active, or powered, damper as follows.

The basic architecture employed a sensor to sense strain in the ski, a power amplifier/control module and an actuator which is powered by the control module, as illustrated in FIGURE 1B. Rather than place the sensor inside the local strain field of the actuator so that it directly senses strain occurring at or near the actuator, applicant placed the sensor outside of the strain field but not so far away that any nodes of the principal structural modes of the ski would appear between the actuator and the sensor. Applicant refers to such a sensor/actuator placement, i.e., located closer to the actuator than the strain nodal lines for primary modes, as an "interlocated" sensor. The sensor "s" may be ahead of, behind, both ahead of and behind, or surrounding the actuator "a", as illustrated in the schematic FIGURE 7(a)-(j). In one practical

- 14 -

embodiment, the actuator itself was positioned at the point on the ski where the highest strains occur in the modes of interest. For a commercially available ski, the first mode had its highest strain directly in front of the boot. However, in building the prototype embodiment, to accommodate constraints on available placement locations, applicant placed the actuator several inches further forward in a position where it was still able to capture 2.4% of the total strain energy of the first mode. An interlocated sensor was then positioned closer to the boot to sense strain at a position close enough to the actuator that none of the lower frequency mode strain node lines fell between the sensor and the actuator. As a control driving arrangement, this combination produced a pair of zeros at zero Hertz (AC coupling) and an interlaced pole/zero pattern up to the first mode which has strain node line between the sensor and actuator. The advantage of this arrangement is that when a controller with a single low frequency pole (e.g., a band limited integrator) is combined with the low frequency pair of zeros, a single zero is left to interact with the flexible dynamics of the ski. This single zero effectively acts as rate feedback and damping. However, since the control law itself is an integrator, it is inherently insensitive to high frequency noise and no additional filtering is needed. The absence of filter eliminates the possibility of causing a high frequency instability, thus assuring that, although incompletely modeled and subject to variable boundary conditions, the active ski has no unexpected instability.

For this ski, it was found that placing the sensor three to four inches away from the actuator and directly in front of the binding produce the desired effect. A band limited integrator with a corner frequency of 5Hz., well below the first mode of the ski at 13Hz. was used as a controller. The controller gain could be varied to induce anywhere from 0.3% to 2% of active damping. The limited power available from the batteries used to operate the active control made estimation of power requirements critical. Conservative estimates were made assuming the first mode was being excited to a high enough level to saturate the actuators. Under this condition, the controller delivers a square wave of amplitude equal to the supply voltage to a capacitor. The power required in this case is:

$$P = \frac{\omega C V^2}{\pi}$$

where C is the actuator capacitance and ω is the modal frequency in radians per second.

The drive was implemented as a capacitance charge pump having components of minimal size and weight and being relatively insensitive to vibration, temperature, humidity, and battery voltage. A schematic of this circuit is shown in FIGURE 3. The active control input was a charge amplifier to which the small sensing element could be effectively coupled at low frequencies. The charge amp and conditioning electronics both run off lower steps on the charge pump ladder than the actual amplifier output, to keep power consumption of this input stage small. Molded axial solid tantalum capacitors were used because of their high mechanical

- 15 -

integrity, low leakage, high Q, and low size and weight. An integrated circuit was used for voltage switching, and a dual FET input op amp was used for the signal processing. The output drivers were bridged to allow operation from half the supply voltage thus conserving the supply circuitry and power. Resistors were placed at the output to provide a stability margin, to protect against back drive and to limit power dissipation. Low leakage diodes protected the charge amp input from damage. These latter circuit elements function whether the active driving circuit is ON or OFF, a critical feature when employing piezoceramic sensors that remain connected in the circuitry. An ordinary 9-volt clip-type transistor radio battery provided power for the entire circuit, with a full-scale drive output of 30-50 volts.

Layout of the actuator/sensor assembly of the actively-driven prototype is shown in FIGURES 8, 8A and 8B. An actuator similar in construction and dimensions to that of FIGURE 6A was placed ahead of the toe release, and lead channels were formed in the ski's top surface to carry connectors to a small interlocated piezoceramic strain sensor, which was attached to the body of the ski below the power/control circuit box, shown in outline. The electroactive assembly included three layers each containing four PZT wafers and was embedded in a recess approximately two millimeters deep, with its lower surface directly bonded to the uppermost stiff structural layer within the ski's body. The provision of three layers in the assembly allowed a greater amount of strain energy to be applied.

Field testing of the ski with the active damper arrangement provided surprising results. Although the total amount of strain energy was under five percent of the strain energy in the ski, the damping affect was quite perceptible to the skiers and resulted in a sensation of quietness, or lack of mechanical vibration that enhanced the ski's performance in terms of high speed stability, turning control and comfort. In general, the effect of this smoothing of ski dynamics is to have the running surfaces of the ski remain in better contact with the snow and provide overall enhanced speed and control characteristics.

The prototype embodiment employed approximately a ten square inch actuator assembly arrayed over the fore region of a commercial ski, and was employed on skis having a viscoelastic isolation region that partially addressed impact vibrations. Although the actuators were able to capture less than five percent of the strain energy, the mechanical effect on the ski was very detectable in ski performance.

Greater areas of actuator material could be applied with either the passive or the active control regimen to obtain more pronounced damping affects. Furthermore, as knowledge of the active modes a ski becomes available, particular switching or control implementation may be built into the power circuitry to specifically attack such problems as resonant modes which arise under particular conditions, such as hard surface or high speed skiing.

- 16 -

The actuator is also capable of selectively increasing vibration. This may be desirable to excite ski modes which correspond to resonant undulations that may in certain circumstances reduce frictional drag of the running surfaces. It may also be useful to quickly channel energy into a known mode and prevent uncontrolled coupling into less desirable modes, or those modes
5 which couple into the ski shapes required for turning.

In addition to the applications to a ski described in detail above, the present invention has broad applications as a general sports damper which may be implemented by applying the simple modeling and design considerations as described above. Thus, corresponding actuators may be applied to the runner or chassis of a luge, or to the body of a snowboard or cross country ski.
10 Furthermore, electroactive assemblies may be incorporated as portions of the structural body as well as active or passive dampers, or to change the stiffness, in the handle or head of sports implements such as racquets, mallets and sticks for which the vibrational response primarily affects the players' handling rather than the object being struck by the implement. It may also be applied to the frame of a sled, bicycle or the like. In each case, the sports implement of the
15 invention is constructed by modeling the modes of the sports implement, or detecting or determining the location of maximal strain for the modes of interest, and applying electroactive assemblies material at the regions of high strain, and shunting or energizing the material to control the device.

Rather than modeling vibrational modes of a sports implement to determine an optimum
20 placement for a passive sensor/actuator or an active actuator/sensor pair, the relevant implement modes may be empirically determined by placing a plurality of sensors on the implement and monitoring their responses as the implement is subjected to use. Once a "map" of strain distribution over the implement and its temporal change has been compiled, the regions of high strain are identified and an actuator is located, or actuator/sensor pair interlocated there to affect
25 the desired dynamic response.

A ski interacts with its environment by experiencing a distributed sliding contact with the ground, an interaction which applies a generally broad band excitation to the ski. This interaction and the ensuing excitation of the ski may be monitored and recorded in a straightforward way, and may be expected to produce a relatively stable or slowly evolving strain distribution, in which
30 a region of generally high strain may be readily identified for optional placement of the electroactive assemblies. A similar approach may be applied to items such as bicycle frames, which are subject to similar stimuli and have similarly distributed mechanics.

An item such as mallet or racquet, on the other hand, having a long beam-like handle and a solid or web striking face at the end of the handle, or a bat with a striking face in the handle,
35 generally interacts with its environment by discrete isolated impacts between a ball and its striking face. As is well known to players, the effect of an impact on the implement will vary greatly

- 17 -

depending on the location of the point of impact. A ball striking the "sweet spot" of a racquet or bat will efficiently receive the full energy of the impact, while a glancing or off-center hit with a bat or racquet can excite a vibrational mode that further reduces the energy of the hit and also makes it painful to hold the handle. For these implements, the discrete nature of the exciting input makes it possible to excite many longitudinal modes with relatively high energy. Furthermore, because the implement is to be held at one end, the events which require damping for reasons of comfort, will in general have high strain fields at or near the handle, and require placement of the electroactive assembly in or near that area. However, it is also anticipated that a racquet may also benefit from actuators placed to damp circumferential modes of the rim, which may be excited when the racquet nicks a ball or is impacted in an unintended spot. Further, because any sports implement, including a racquet, may have many excitable modes, controlling the dynamics may be advantageous even when impacted in the desired location. Other sports implements to which actuators are applied may include luges or toboggans, free-moving implements such as javelins, poles for vaulting and others that will occur to those skilled in the art.

FIGURE 9 illustrates a golf club embodiment 90 in accordance with the present invention. Club 90 includes a head 91, an elongated shaft 92, and a handle assembly 95 with an actuator region 93. FIGURE 9A shows the general distribution of strain and displacement experienced by the club upon impact, e.g. those of the lowest order longitudinal mode, somewhat asymmetric due to the characteristic mass distribution and stiffness of the club, and the user's grip which defines a root of the assembly. In this embodiment an electroactive assembly is positioned in the region 93 corresponding to region "D" (FIGURE 9A) of high strain near the lower end of the handle. FIGURE 9B illustrates such a construction. As shown in cross-section, the handle assembly 95 includes a grip 96 which at least in its outermost layers comprises a generally soft cushioning material, and a central shaft 92a held by the grip. A plurality of arcuate strips 94 of the electroactive assembly are bonded to the shaft and sealed within a surrounding polymer matrix, which may for example be a highly crosslinked structural epoxy matrix which is hardened *in situ* under pressure to maintain the electroactive elements 94 under compression at all times. As in the ski embodiment of FIGURE 1A, the elements 94 are preferably shunted to dissipate electrical energy generated therein by the strain in the handle.

The actuators may also be powered to alter the stiffness of the club. In general, when applied to affect damping, increased damping will reduce the velocity component of the head resulting from flexing of the handle, while reduced damping will increase the attainable head velocity at impact. Similarly, by energizing the actuators to change the stiffness, the "timing" of shaft flexing is altered, affecting the maximum impact velocity or transfer of momentum to a struck ball.

- 18 -

FIGURE 9C illustrates a baseball bat construction 190 of the present invention. As in the golf club embodiment, the electroactive material 194 is positioned around the circumference of the handle region 195 and bonded to the body 192. A cushioning wrap 196 surrounds the handle portion, and serves to protect the material 194 from damaging impact, to reduce the transmission of shock to the batter's hands and to provide additional damping. As shown above for the golf club and ski embodiments, the electroactive material 194 preferably comprises a layer of material such as a stiff piezoceramic material sealed between electroded sheets, and is shunted to dissipate the vibrational energy which enters the electroactive material when the body 192 is struck. In this construction shunt and other circuit elements may be conveniently fitted inside the handle of the bat, where they are fully protected and do not impair the balance and strength of the bat.

To demonstrate the efficacy of such an electroactive damping arrangement, applicant undertook to construct a baseball bat having a damping assembly as described. A metal (e.g. aluminum) bat was used in a prototype embodiment, and provided a stiffness which was mechanically well matched to the electroactive material, a piezoceramic, which was employed in the damper. Applicant determined the vibrational response of the bat and optimized the shunt circuitry and configured the damping assembly to operate most effectively at the most prominent vibrations, with the electroactive material being positioned in an assembly bonded to the bat body in a position near the handle.

Figure 13A shows the vibrational response to stimulation as measured in three bats, which were freely suspended, and had lengths of 27, 28 and 29 inches. As shown, each bat had a first pronounced resonance in the range of 160 to 200 Hz, and a second resonance in the range of 550 to 750 Hz, with the longer bats having their resonances shifted toward a lower frequency. Figure 13B shows the corresponding response curves when each bat was hand held. Holding the bat smoothed the response somewhat from its initial highly-defined or sharp metallic resonance. The peaks, however, remain well-defined and of high amplitude, indicating a great deal of vibrational energy in these two frequency bands.

Accordingly, applicant undertook to capture and remove strain energy in those resonance bands by configuring the electroactive material to contact the bat over a surface area for receiving strain energy, and placing a tuned shunt circuit across the material to act with enhanced effect at the target frequency. A practical method of achieving this is described in commonly owned earlier filed United States Patent Application Serial No. 08/797,004, filed on February 7, 1997 and entitled Adaptive Sports Implement with Tuned Damping, and further in international application PCT/US98/02132, to which reference is made for general mechanical and circuit considerations involved in enhancing strain energy dissipation of structural vibration. That patent application, together with its corresponding international application filed on February 6, 1998 in the United States PCT Receiving Office are hereby incorporated by

- 19 -

reference for purposes of such disclosure. As will be understood from Figures 13A and 13B, a substantial amount of damping, above about .001, is necessary to remove or substantially diminish the observed peaks. Moreover, this level of damping is to be obtained for each of two widely separated resonances, both of which, moreover, may occur in slightly different regions depending on the size of the bat and other factors, such as manufacturing tolerances, which may shift the resonances.

In order to obtain a larger damping effect, applicant positioned the electroactive material substantially entirely around the bat at a position near the hand grip. As shown in Figure 9C, the electroactive material 194 occupies a region extending from the root position of the bat, starting about ten centimeters from the tip, and extending five or ten centimeters along the length of the bat. The material 194 is preferably pre-assembled into a laminated, electroded sheet or package, as described in the aforesaid patent documents, in which the outer layers serve to bind and reinforce the material, while being thin enough to permit effective strain coupling between the bat body and the electroactive material through the intervening layer.

The bat is generally tapered and conical in overall shape, and the laminated package may be pre-formed into a correspondingly fitted curved shell-like shape by a method such as press-lamination as shown in commonly-owned U.S. patent 5,687,462. The electroactive package is then bonded to the bat body, for example by a thin layer of epoxy or acrylic cement.

In a preferred embodiment however, rather than employing a cylindrical or conical shell package, applicant undertook to build a damping assembly which contained a large area of electroactive material in contact with the bat in the handle region, but achieved the desired area of coverage by including multiple separated panels of electroactive material within the laminated assembly. This allowed the assembly to be bent or wrapped around the handle of the bat, bringing each panel of piezoelectric actuation material into a separate position in alignment against the bat surface so that all are easily attached to the bat in a single operation. By avoiding a large continuous shell structure, the danger of cracking and delamination is avoided. The separate panels were laminated in subregions of a single common sheet assembly, which served as a flexible interconnection of defined size and shape to dependably align and attach the electroactive material to the bat.

In the preferred embodiment, elongated slots were milled through the assembly between the actuator panels, further enhancing the flexibility of the package for fitting to the bat. Eight panels of material were employed in the assembly, and these were arranged in opposed pairs of elements. The pairs were allocated in a first group in which each pair was attached to a separate circuit tuned to cover the lower frequency resonance, and a second group of pairs placed in corresponding circuits tuned to cover the higher frequency resonance. Both groups were formed in a single sheet assembly of the included subregions, and this was configured to wrap around the

- 20 -

handle as a continuous unit and to provide a set of leads to the shunt circuitry. The shunt circuitry for this assembly was tuned to provide a separate resonant circuit across each subassembly directed at its targeted mode, i.e., the 165 Hz or the 650 Hz nominal vibrations.

Figure 14 illustrates details of such a damped bat assembly 200. As shown, the assembly includes a generally tapered cylindrical bat body 210, an electroactive package 220 containing strain actuation material, and an electronic circuit 230. The illustrated bat is a metal bat formed with a hollow interior, and the electronic circuit 230 is configured to fit within the hollow of the handle through the end of the bat. A cap 235 closes and seals the end of the bat, and the circuit 230 is connected to the package 220 via wire connections 215. As further shown in the Figure, the bat has an extreme end portion 202 generally gripped by the user's hands and constituting, mechanically, the root of the implement, as described above in other contexts. The electroactive material is coupled to the bat body in a mounting portion 204 proximate to the root and away from the general ball contact surface or batting impact area, which lies further up the body of the bat. It will be appreciated by reference to Figure 9C that the region 204 is under the wrapping and may even be partly or largely covered by the batter's hands in use.

As best shown in the view of FIGURE 14A, in one embodiment, the mounting portion 204 advantageously has a number of flats 204a, 204b... formed about its circumference, each of which is several inches long and extends over a portion of the circumference so as to provide a flat mounting surface on the generally rounded bat body. Correspondingly, the electroactive pack 220 is illustrated as having eight elongated subregions 222_i, each of which contains a thin layer of electroactive material and is electroded by leads which connect opposed sides of the material so as to effectively couple electrical energy across the layer. Score marks S of which one is illustrated may be formed between the adjacent active regions or elements to allow the entire package to flexibly bend or fold and better conform around the bat, and thus also to position each sheet of electroactive material squarely on one of the corresponding mounting faces 204a, 204b.... In addition, registration features R may be provided in the sheet to facilitate alignment and positioning of the assembly when attaching it to the bat surface. The modular electroactive package thus presents a relatively large area of contact, while allowing separate electrodes to reach each sub-element, and providing areas of flexibility to assure that each element may be independently placed and coupled.

The allocation of electroactive elements was further arranged so that each of the groups - the first mode damping pairs and the second mode damping pairs-- was positioned so that some elements responded primarily to bending along one direction, and others of the same group responded to bending in a transverse direction. By placing the elements on flats formed on the bat surface, the elements were each coupled to act efficiently on bending of that surface. The provision of a regular eight sided handle area thus allowed placement of a first pair of each group

- 21 -

on two opposite faces, and a second pair of the group on two faces oriented perpendicular thereto. The groups targeting the two modes alternated, and were placed at positions shifted by $\pi/4$ around the handle. This arrangement assured that whatever side of the circularly-symmetric bat were to strike the ball, the substantially single-plane bending induced by the ball impact would be effectively captured by one or more pairs of elements in each group.

In accordance with a further and principal aspect of the present invention, the electroactive strips 222_i are arranged in different groupings, and each grouping is connected via leads 215 to separate shunt circuits of the circuit assembly 230, which is housed within an electronics enclosure 232 (FIGURE 14). Thus, the electronic circuit 230 is understood to include at least one and preferably several shunts, which as described below, may be and preferably are, of several types or resonance values.

In the preferred embodiment, the shunts are configured so that when placed across a grouping of electroactive sheets {222_i}, the intrinsic capacitance, resistance and inductance of the circuit together constitute a resonant circuit at one of the modal frequencies, e.g. the peaks illustrated in Figures 13A, 13B, and which operate to enhance and thus more effectively shunt signal energy occurring across the sheets at that frequency. In a preferred embodiment, the circuit elements include a first shunt effective at the lower (165 Hz) resonance and a second shunt effective at the next (650 Hz) resonance, and these shunts are inductive circuits which are detuned, or arranged to resonate over a relatively broad band extending on both sides about the nominal frequency of the respective targeted mode. The design of such broad band inductive shunts is described in further detail in the aforesaid U.S. Patent Application and corresponding International Application.

FIGURE 15 shows the added damping achievable with this construction. As shown, a nodal frequency around 165 Hz was targeted and a level of added damping between about .001 and .004 was achieved over a band extending approximately 20 Hz on each side of the target frequency. For the higher frequency component, a broader band detuned inductive shunt was employed, and both shunts were placed within the common circuit enclosure 232 and sealed within the bat.

In order to achieve a compact circuit package 232, 230 with relatively little effect on the inertial properties of the bat, the prototype embodiment arranged the eight strips of electroactive material into four subgroups of two strips each. Each opposed pair of strips was connected to a separate inductor wound on a core and all housed within the enclosure 232. This assembly occupied a roughly cylindrical shape approximately 15 millimeters in diameter and eight centimeters long. An LED was placed at the extreme tip and the assembly, after being epoxy bonded within the handle 202 of the bat, was closed with a transparent plastic end cap 253 covering the LED. The LED light source was connected across a voltage conditioning circuit so

- 22 -

as to provide a nominal low LED drive voltage and indicate the generation of charge when the bat was subject to vibration. This construction visibly shows the integrity of electrical connections of the assembly, and serves the purpose of reassuring the batter that the damping assembly is operative.

5 In the bat embodiment, the size of the bat, inertial constraints, and the extreme conditions of use all posed constraints for configuring an effective damping system. Further, the use of inductive shunts with detuned or wide peak resonance to address the expected vibrational spectrum entailed the use of massive electrical coils. By subdividing the electroactive material into patches of small area, applicant was able to cover a sufficient area of the bat to capture
10 several modes effectively using subgroups of separately tuned inductor coils. This circuitry enhanced the strain-generated voltage at the frequencies of interest so that its energy was dissipated by the shunt at an increased rate for those frequencies. Further, by positioning the circuit components centrally within the tip of the handle, the balance, strength, weight and inertial handling of the bat were maintained without compromise.

15 Returning now to a discussion of other sports implements, FIGURE 10 illustrates representative constructions for a racquet embodiment 100 of the present invention. For this implement, actuators 110 may be located proximate to the handle and/or proximate to the neck. In general, it will be desirable to dampen the vibrations transmitted to the root which result from impact. FIGURE 10A shows representative strain/displacement magnitudes for a racquet.

20 A javelin embodiment 120 is illustrated in FIGURE 11. This implement differs from any of the striking or riding implements in that there is no root position fixed by any external weight or grip. Instead the boundary conditions are free and the entire body is a highly excitable tapered shaft. The strain/displacement chart is representative, although many flexural modes may be excited and the modal energy distribution can be highly dependent on slight aberrations of form at
25 the moment the javelin is thrown. For this implement, however, the modal excitation primarily involves ongoing conversion or evolution of mode shapes during the time the implement is in the air. The actuators are preferably applied to passively damp such dynamics and thus contribute to the overall stability, reducing surface drag.

FIGURE 12 shows a snow board embodiment 130. This sports implement has two roots,
30 given by the left and right boot positions 121, 122, although in use weight may be shifted to only one at some times. Optimal actuator positions cover regions ahead of, between, and behind the boot mountings.

As indicated above for the passive constructions, control is achieved by coupling strain from the sports implement in use, into the electroactive elements and dissipating the strain energy
35 by a passive shunt or energy dissipation element. In an active control regiment, the energy may be either dissipated or may be effectively shifted, from an excited mode, or opposed by actively

- 23 -

varying the strain of the region at which the actuator is attached. Thus, in other embodiments they may be actively powered to stiffen or otherwise alter the flexibility of the body.

The invention being thus disclosed and described, further variations will occur to those skilled in the art, and all such variations and modifications are considered to be with the spirit and scope of the invention described herein, as defined in the claims appended hereto.

5

What is claimed is:

Claims

- 1 1. A sports implement comprising
2 a body having an extent and including a contact surface which is subject in use to
3 stimulation such that the body vibrates with a distribution of strain energy in said body including a
4 region of strain
5 an electroactive assembly including an electroactive strain element for transducing
6 electrical energy and mechanical strain energy, said electroactive assembly being attached to said
7 body in said region of strain, and
8 circuit across said assembly configured to dissipate said electrical energy and damp
9 vibration of the body.
- 1 2. A sports implement according to claim 1, which is a baseball bat.
- 1 3. A baseball bat according to claim 2, wherein said stimulation excites structural modes of
2 said body giving rise to said strain distribution, and said assembly and circuit shift or damp
3 excitation of modes to improve handling of the bat.
- 1 4. A baseball bat according to claim 2, wherein said strain distribution includes an area of
2 high strain and said assembly is coupled by a substantially shear free coupling to said area of high
3 strain.
- 1 5. A baseball bat according to claim 2, wherein said electroactive assembly is attached near
2 the handle and away from the contact surface.
- 1 6. A baseball bat according to claim 2, wherein the electroactive assembly includes plural
2 regions of separately-electroded piezo material.
- 1 7. A baseball bat according to claim 6, wherein the separate regions are configured to damp
2 distinct modes of the bat.
- 1 8. A baseball bat according to claim 2, wherein said circuit is enclosed in the body.
- 1 9. A baseball bat according to claim 2, comprising an LED indicator in electrical
2 communication with said electroactive assembly.
- 1 10. A baseball bat according to claim 2, wherein said electroactive strain element is electro-
2 ceramic.
- 1 11. A baseball bat according to claim 2, wherein the bat has a grip forming a mechanical root
2 of the bat.
- 1 12. A baseball bat according to claim 2, wherein said circuit is an inductive shunt for
2 dissipating charge generated by strain coupled from said region of strain into said element.

- 25 -

- 1 13. A baseball bat according to claim 2, wherein said strain element is covered by cushioning
2 material.
- 1 14. A baseball bat according to claim 2, wherein said bat is a metal bat and the strain element
2 is attached by a substantially shear free coupling to said body for coupling in-plane strain energy
3 therebetween.
- 1 15. A baseball bat according to claim 2, wherein said electroactive assembly is a curved
2 assembly fitted to the bat.
- 1 16. A baseball bat according to claim 15, wherein said electroactive assembly is a flexible
2 assembly formed as a sheet with relief cuts for conforming to the bat.
- 1 17. A method of damping a baseball bat, such method comprising
2 strain-coupling an electroactive assembly to a region of the bat located proximate
3 to its grip and away from its striking end to receive strain energy from the bat and produce
4 electrical charge therefrom, and
5 placing a circuit across the electroactive assembly to shunt the charge and alter
6 strain in said region thereby changing response of the bat.
- 1 18. The method of claim 17, wherein the step of placing a circuit includes shunting opposed
2 poles of said electroactive assembly to dissipate energy received from said region.
- 1 19. The method of claim 18, wherein said electroactive assembly includes separately-
2 electroded electroactive elements and the step of placing a circuit includes placing separate
3 circuits across subsets of said elements to produce damping.
- 1 20. The method of claim 19, wherein the step of strain coupling an assembly to receive strain
2 energy includes mounting the assembly near a mechanical root of said bat implement over a region
3 effective to receive strain energy from said implement and produce damping of at least (0.15)
4 percent.
- 1 21. The method of claim 19, wherein the step of strain coupling the electroactive assembly
2 includes bonding a sheet actuator around the handle of the bat.
- 1 22. A method of making a damped bat, such method including the steps of
2 providing a bat body
3 adding to the body an electroactive assembly including an electroactive strain element
4 extending along the bat body so as to efficiently couple strain between said element and said body,
5 and
6 shunting charge generated in said strain element at one or more modal frequencies of the
7 bat.

- 26 -

- 1 23. A method of making a damped bat according to claim 22, wherein the steps of adding an
2 electroactive assembly and shunting charge at one or more modal frequencies includes adding
3 separate regions of electroactive material which are shunted to damp distinct modal frequencies of
4 the bat.
- 1 24. A bat having an elongated body with a ball striking end and a grip portion opposed
2 thereto, and a damper attached to said body wherein the damper includes
3 an assembly of at least one piezoelectric element attached to said elongated body such that
4 the strain is effectively coupled between said body and said assembly, and
5 a circuit operative to control charge in the assembly and thereby damp the bat.
- 1 25. A bat according to claim 24 including at least one LED powered by the assembly to
2 indicate damping operation.
- 1 26. A baseball bat according to claim 2, wherein said assembly includes a layer of packaging
2 material about the strain element, and strain is coupled to said element through said packaging
3 material.
- 1 27. A baseball bat according to claim 2, wherein said assembly includes electroactive material
2 configured to damp vibration occurring along plural different axes.
- 1 28. A sports implement according to claim 1, wherein the region of strain includes planar
2 areas and said electroactive assembly is formed as a sheet conformable to said planar areas.
- 1 29. A sports implement according to claim 1, which is an implement selected from among a
2 racquet, a golf club, a mallet, a javelin, a pole and other hand-held implement.

1/17

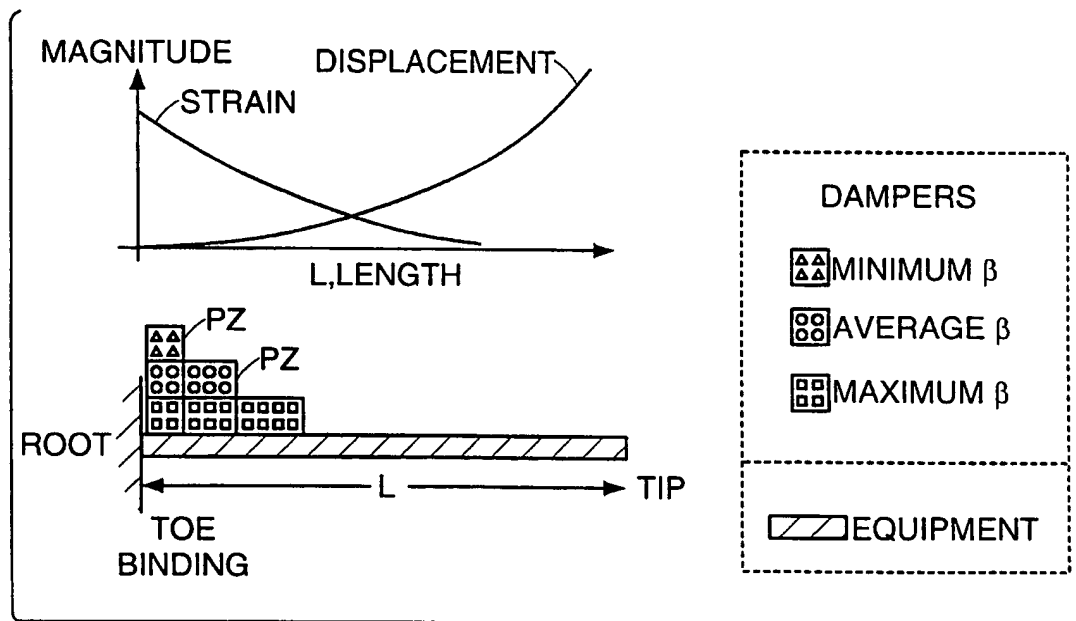
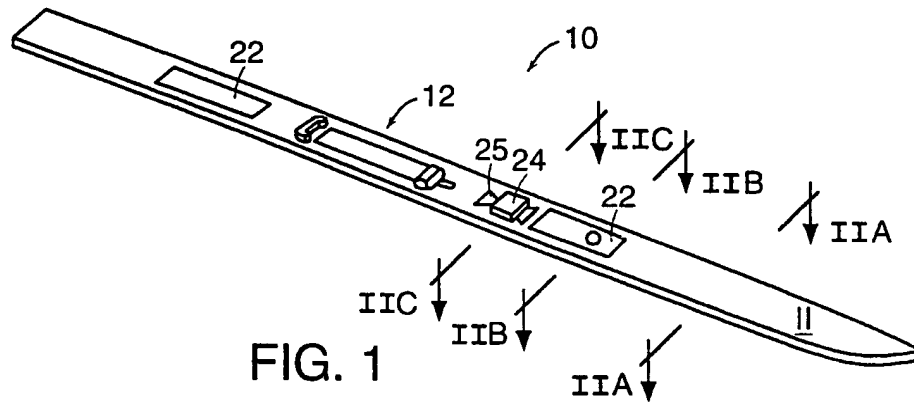


FIG. 5A

2/17

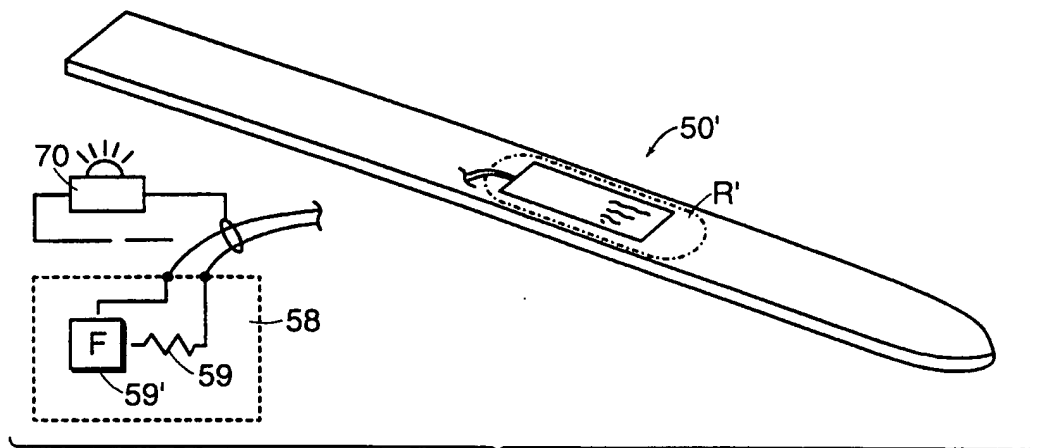


FIG. 1A

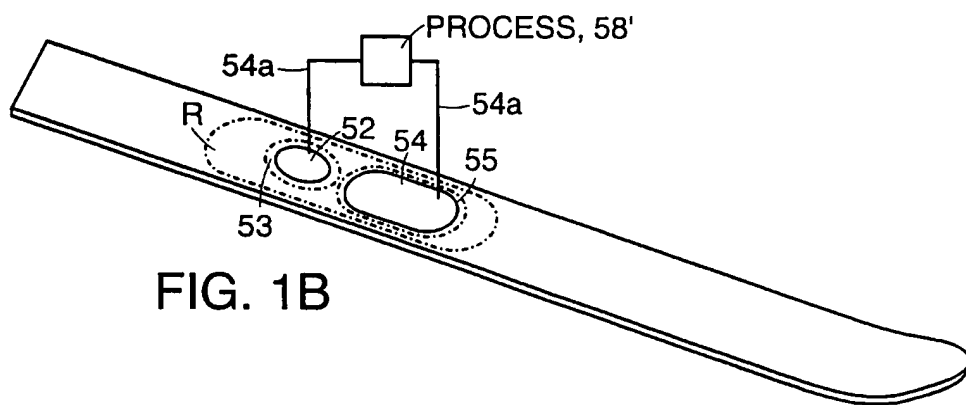


FIG. 1B

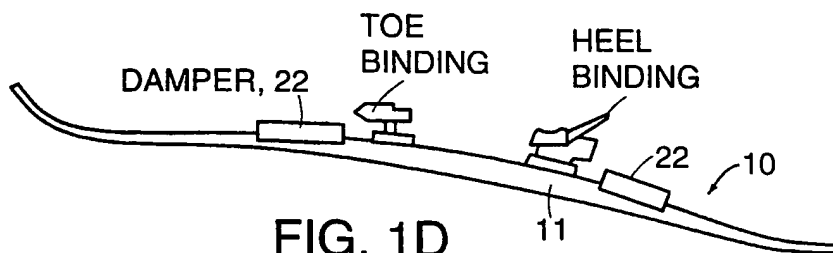


FIG. 1D

3/17

CHIP RESISTOR
CENTERED BETWEEN PADS

SURFACE MOUNT LED

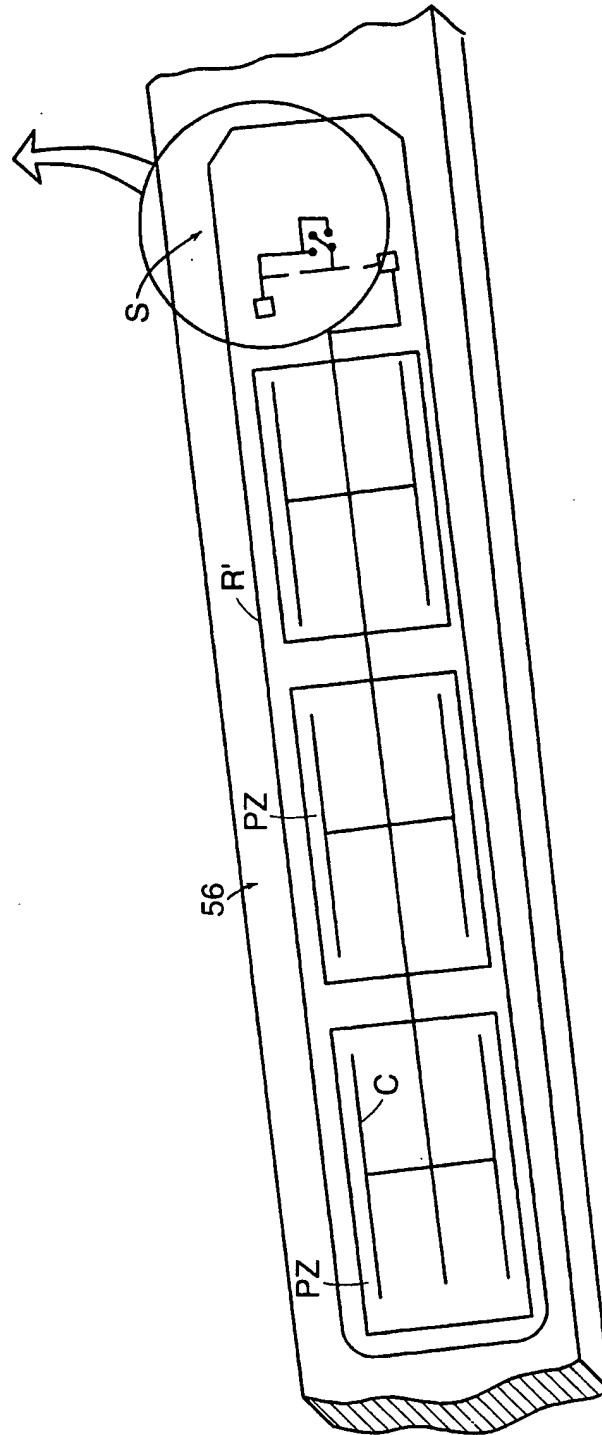


FIG. 1C

4/17

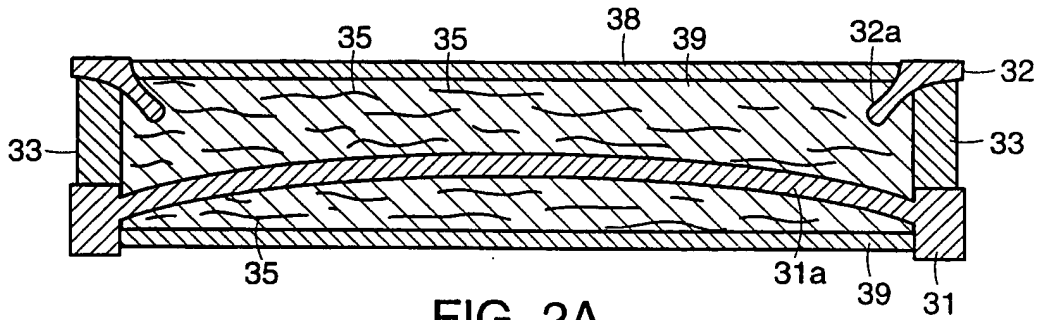


FIG. 2A

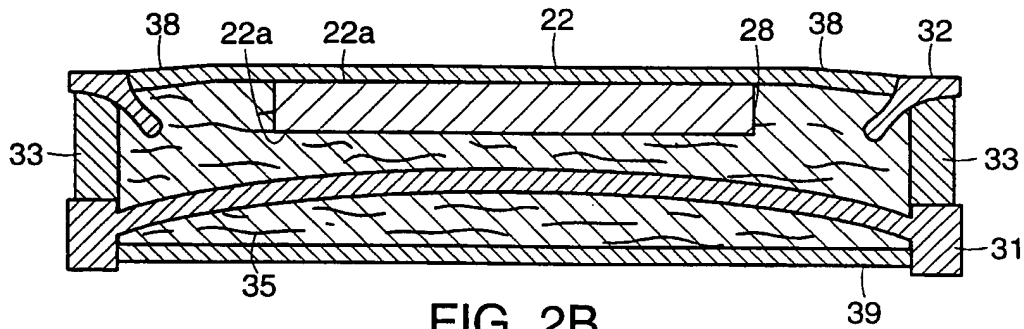


FIG. 2B


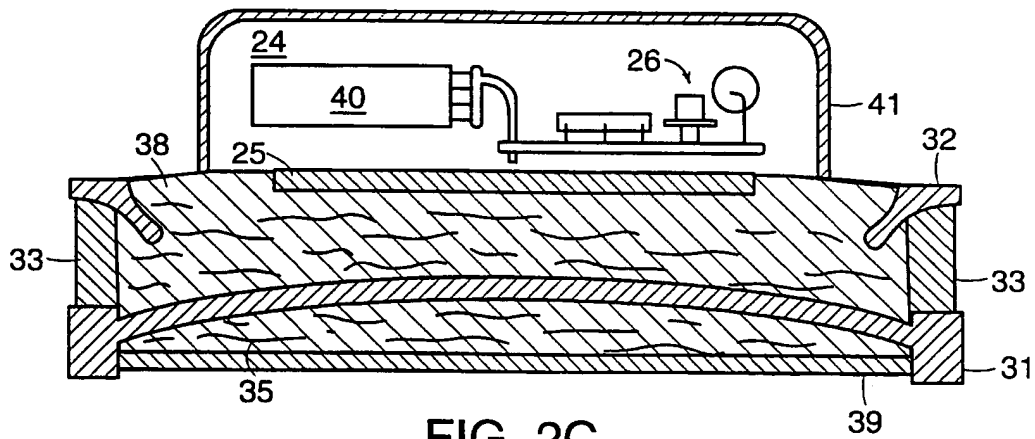



FIG. 2C

5/17

FIG. 3

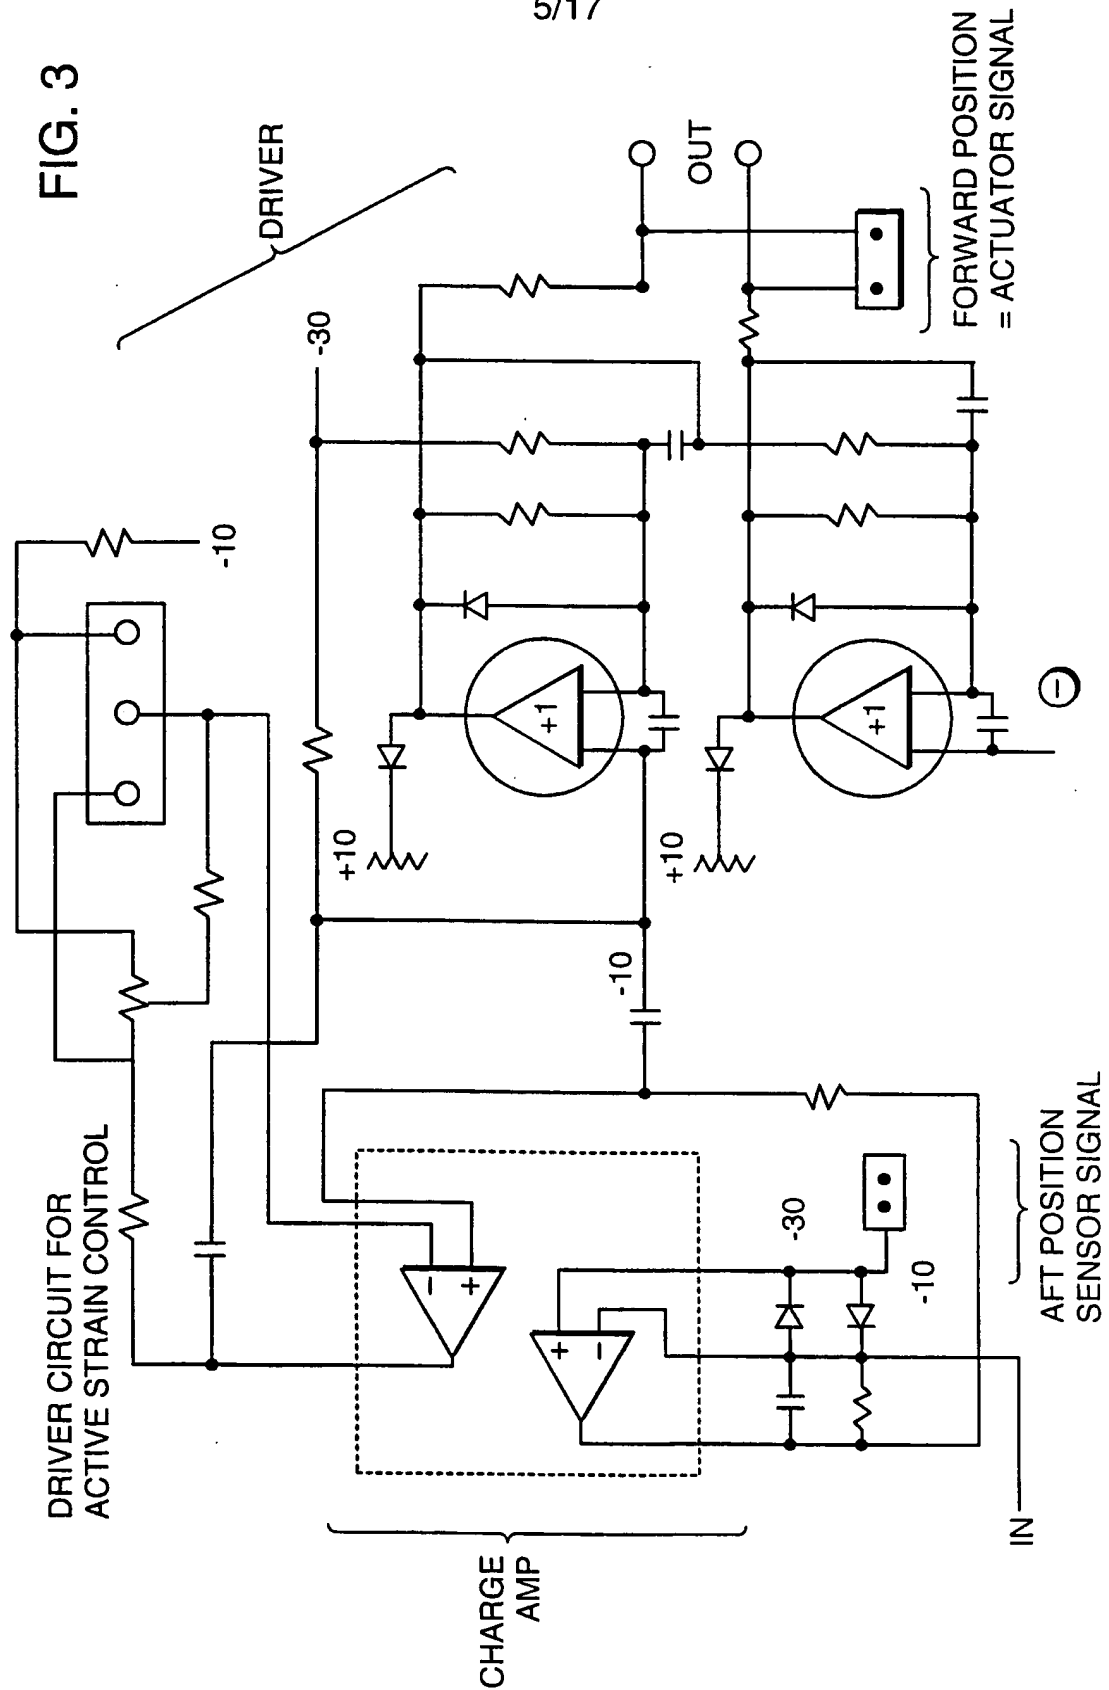

6/17

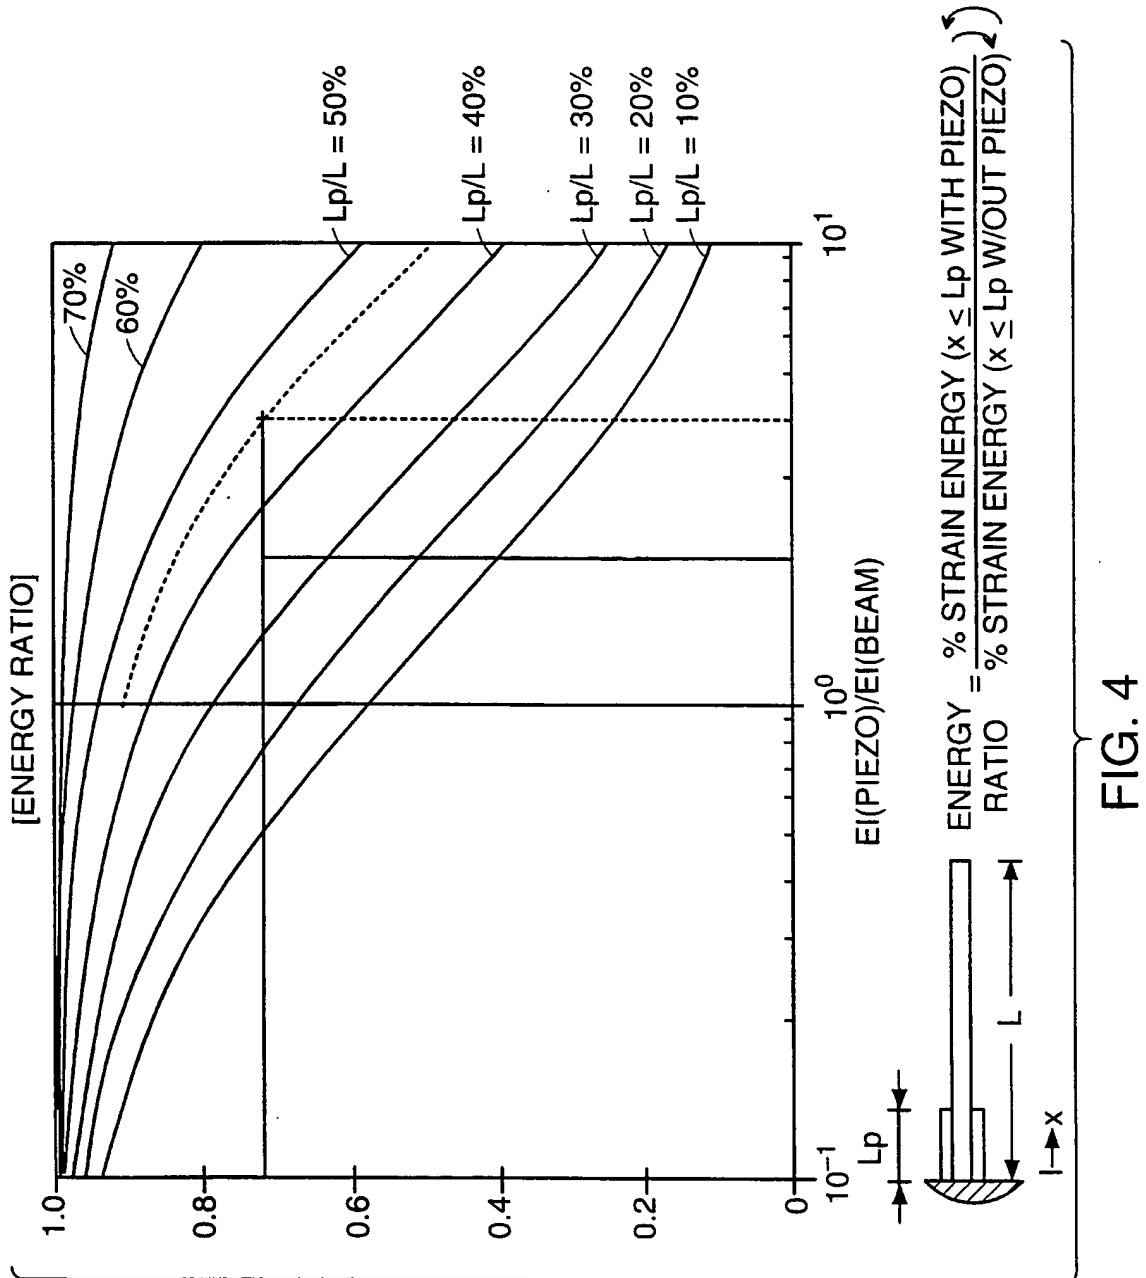

7/17

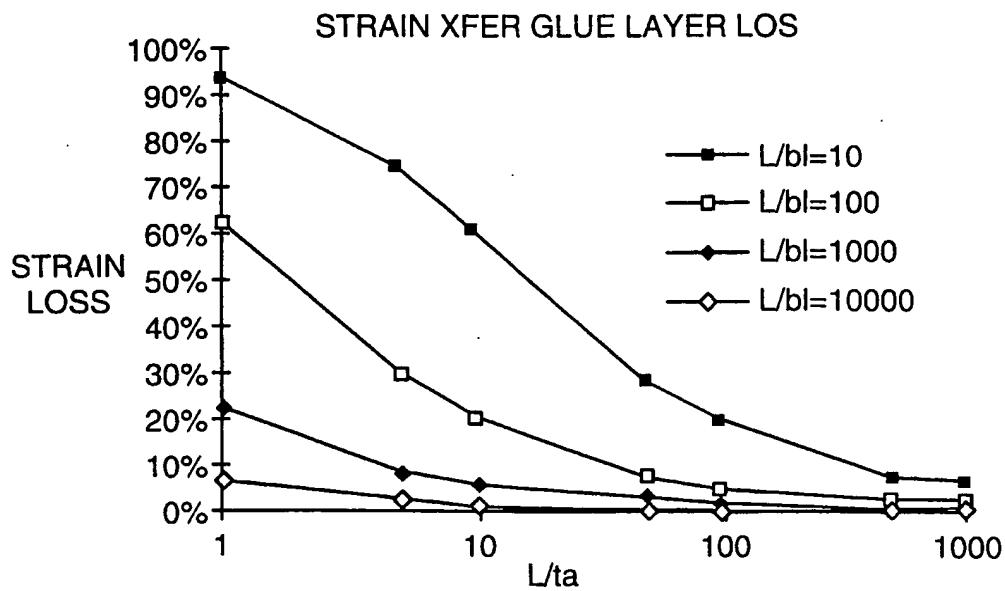


FIG. 5

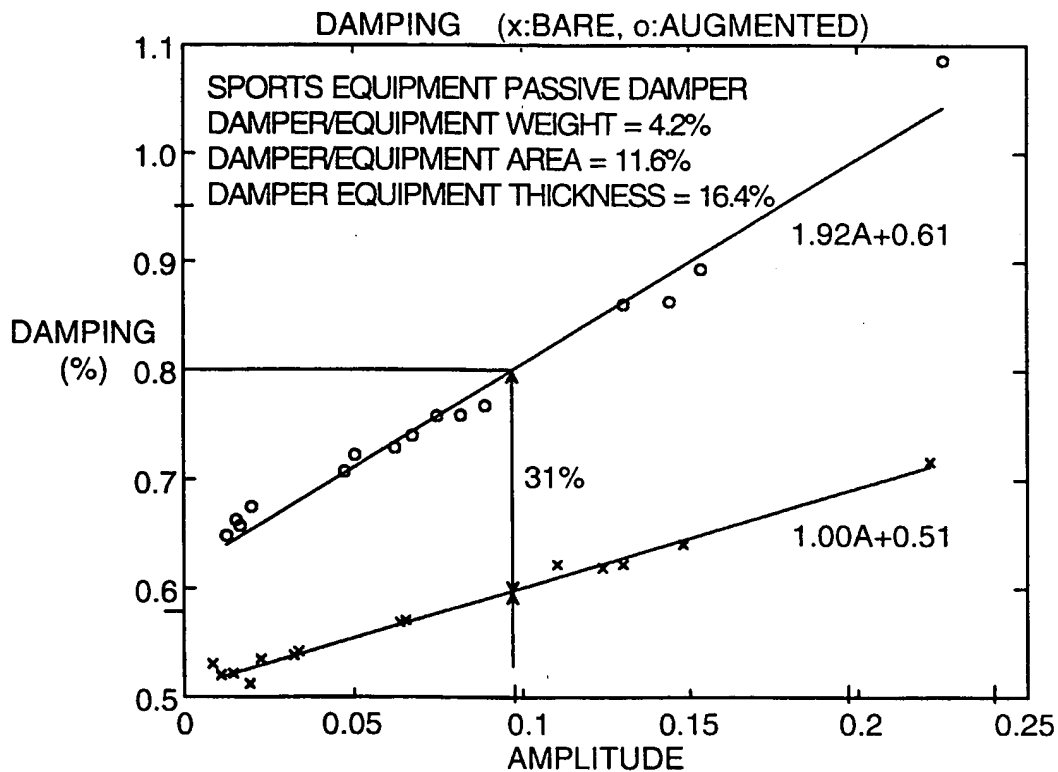


FIG. 6

8/17

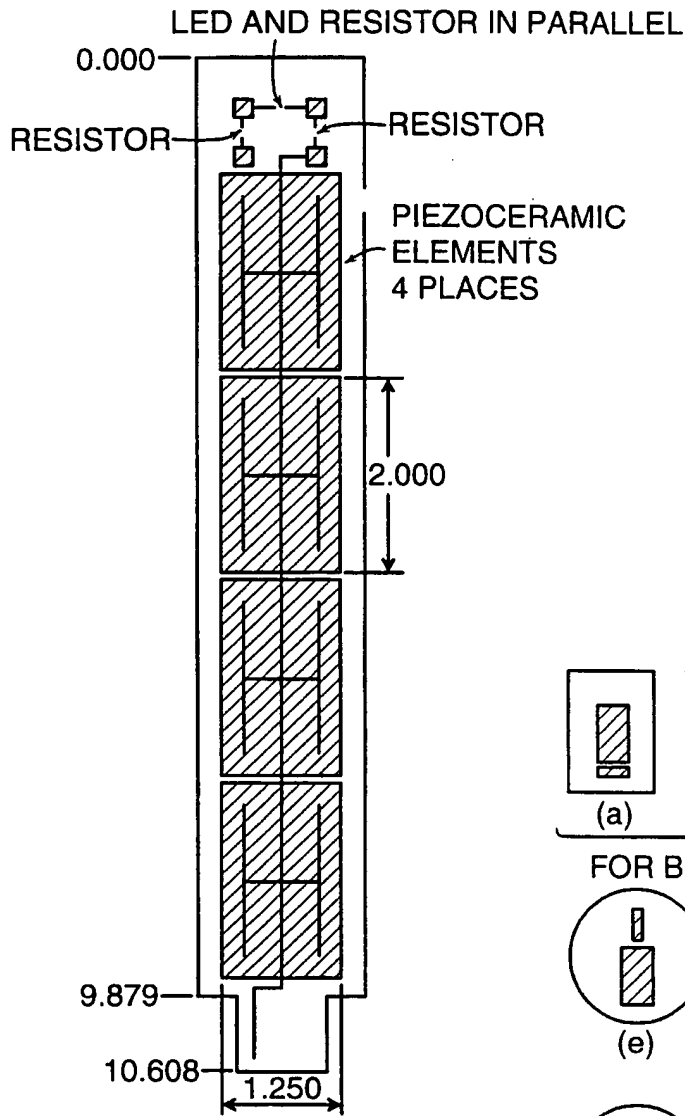


FIG. 6A

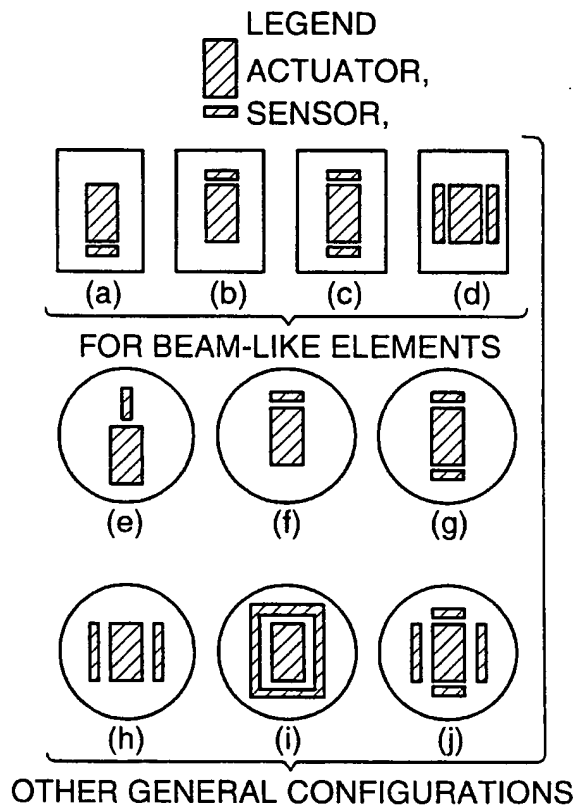


FIG. 7

9/17

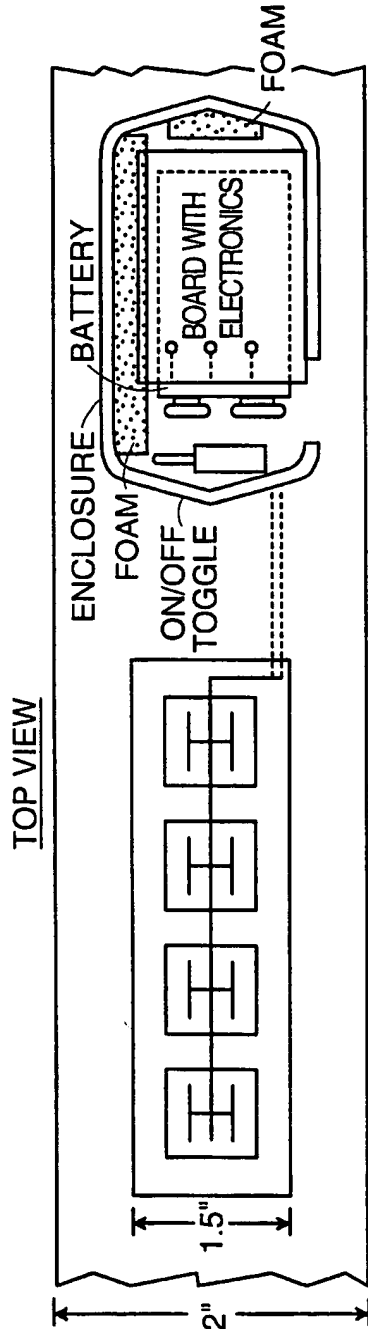


FIG. 8A

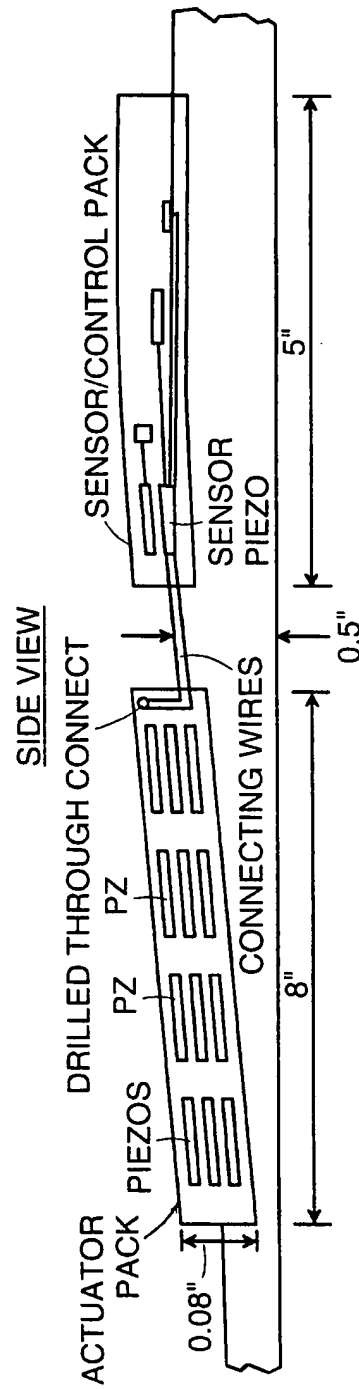


FIG. 8B

10/17

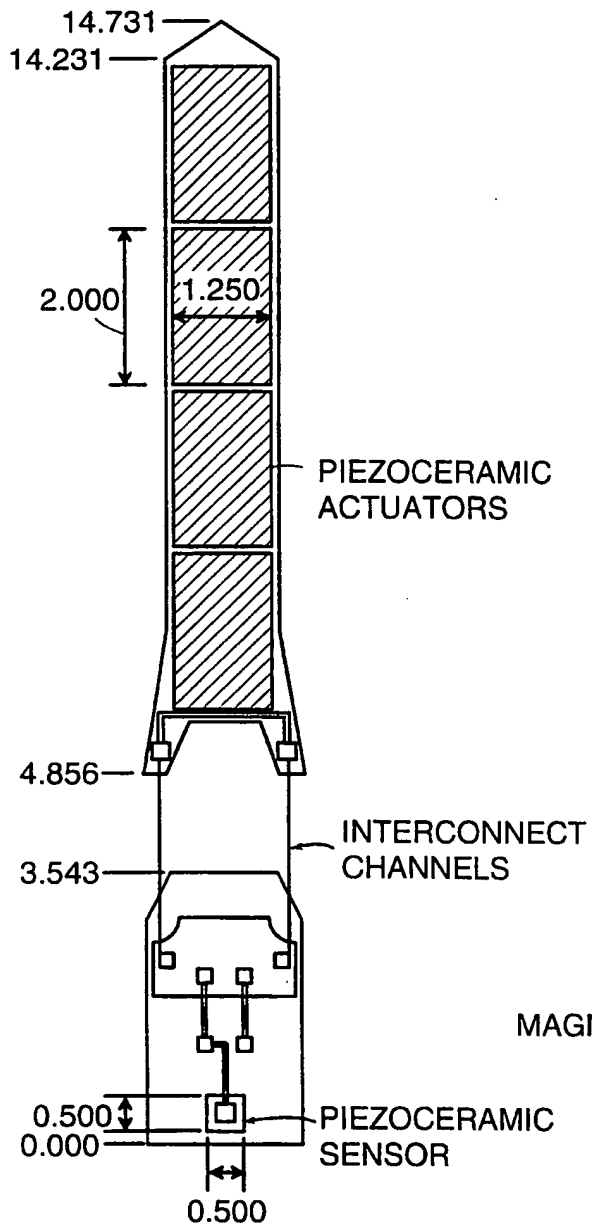


FIG. 8

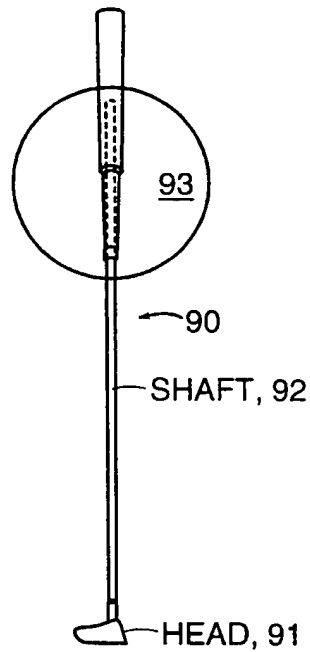


FIG. 9

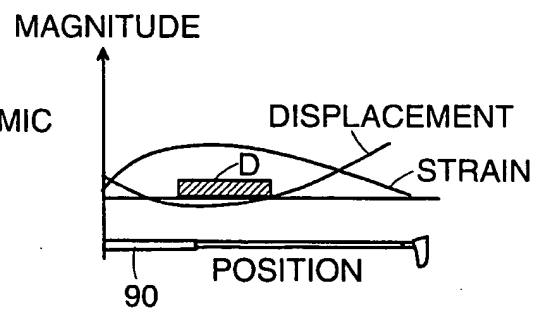


FIG. 9A

11/17




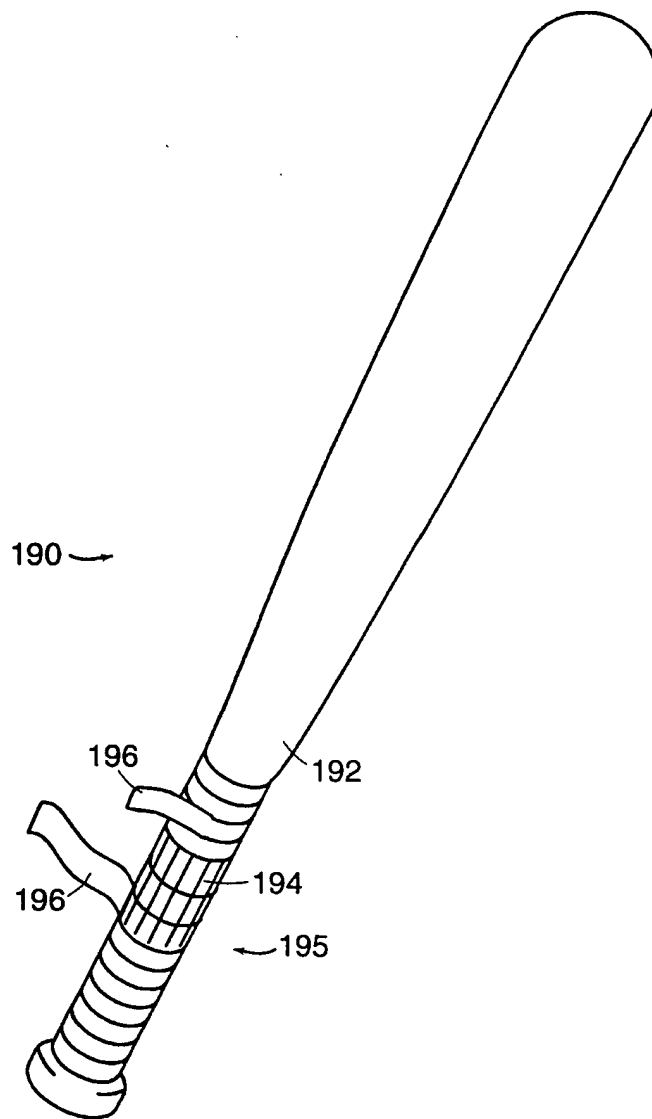


FIG. 9C

12/17

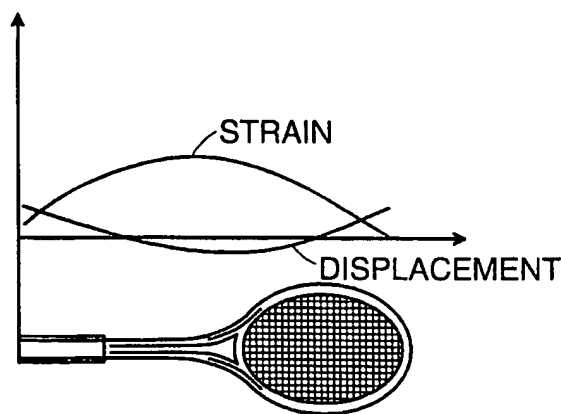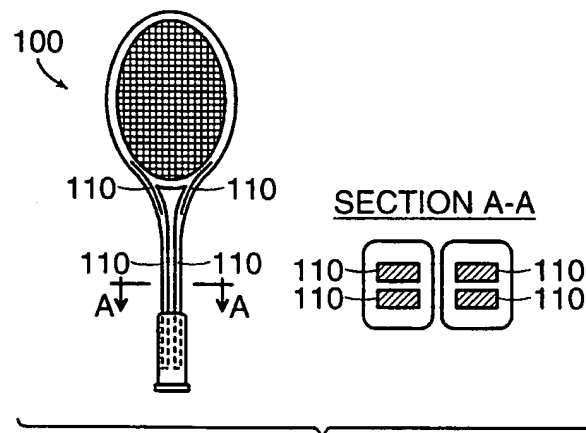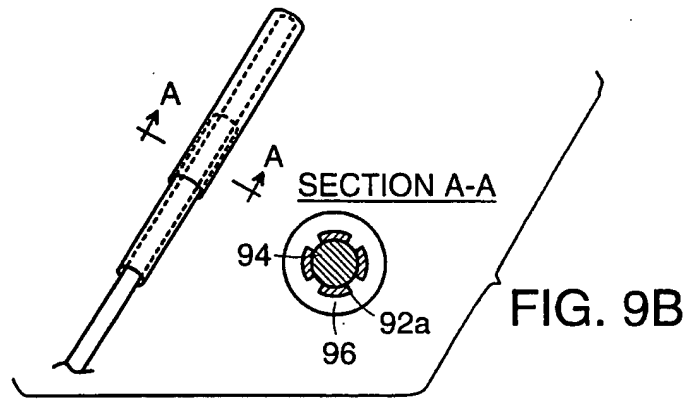

13/17

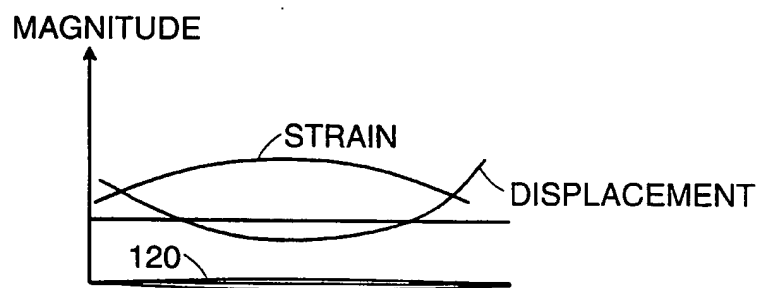


FIG. 11

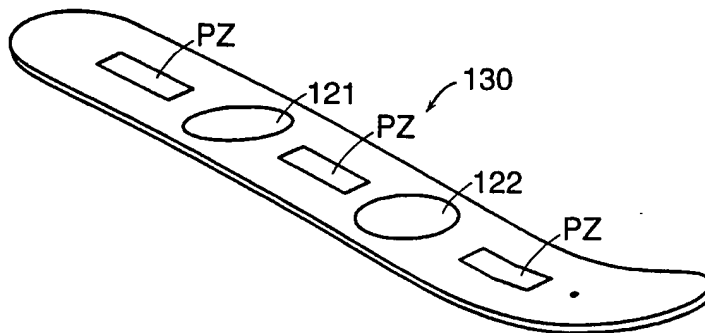


FIG. 12

14/17

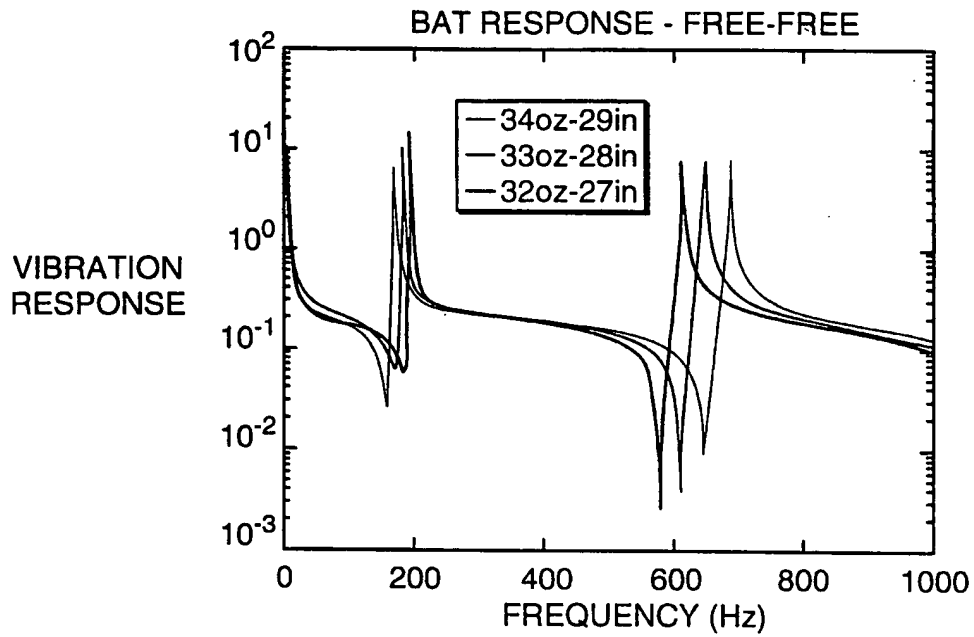


FIG. 13A

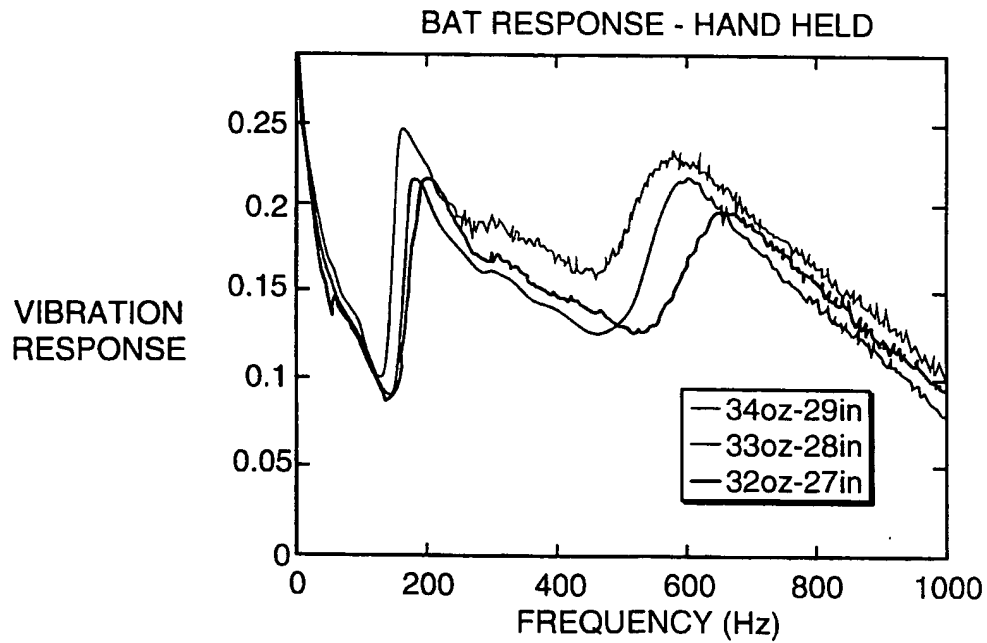


FIG. 13B

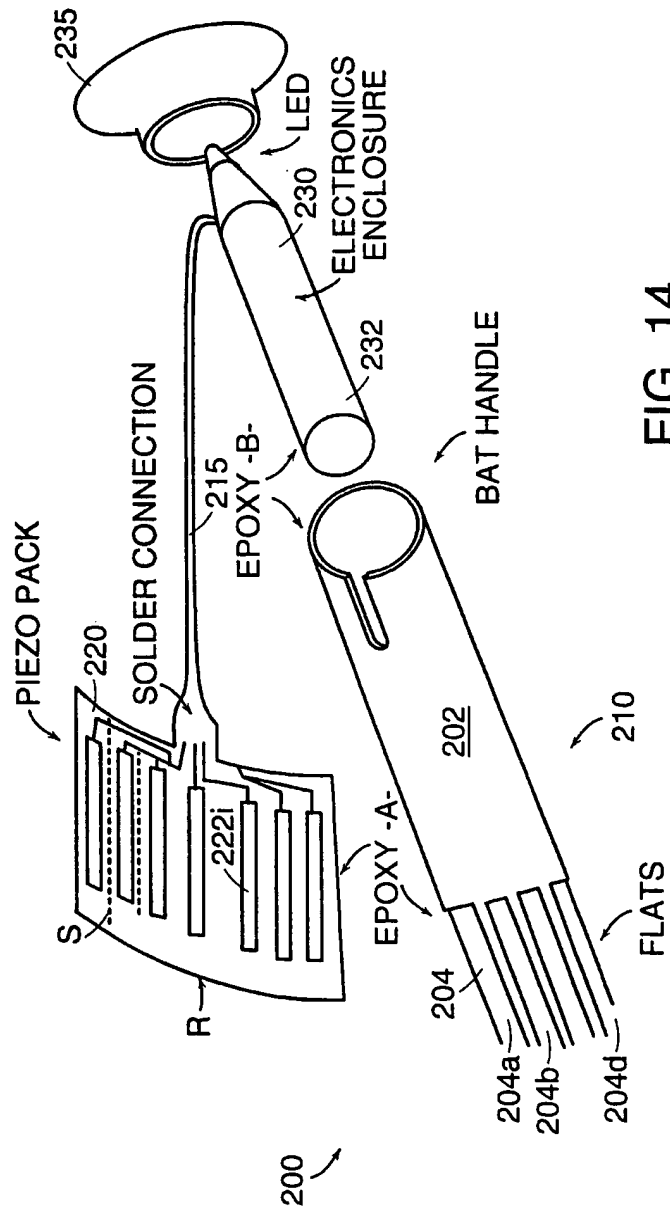


FIG. 14

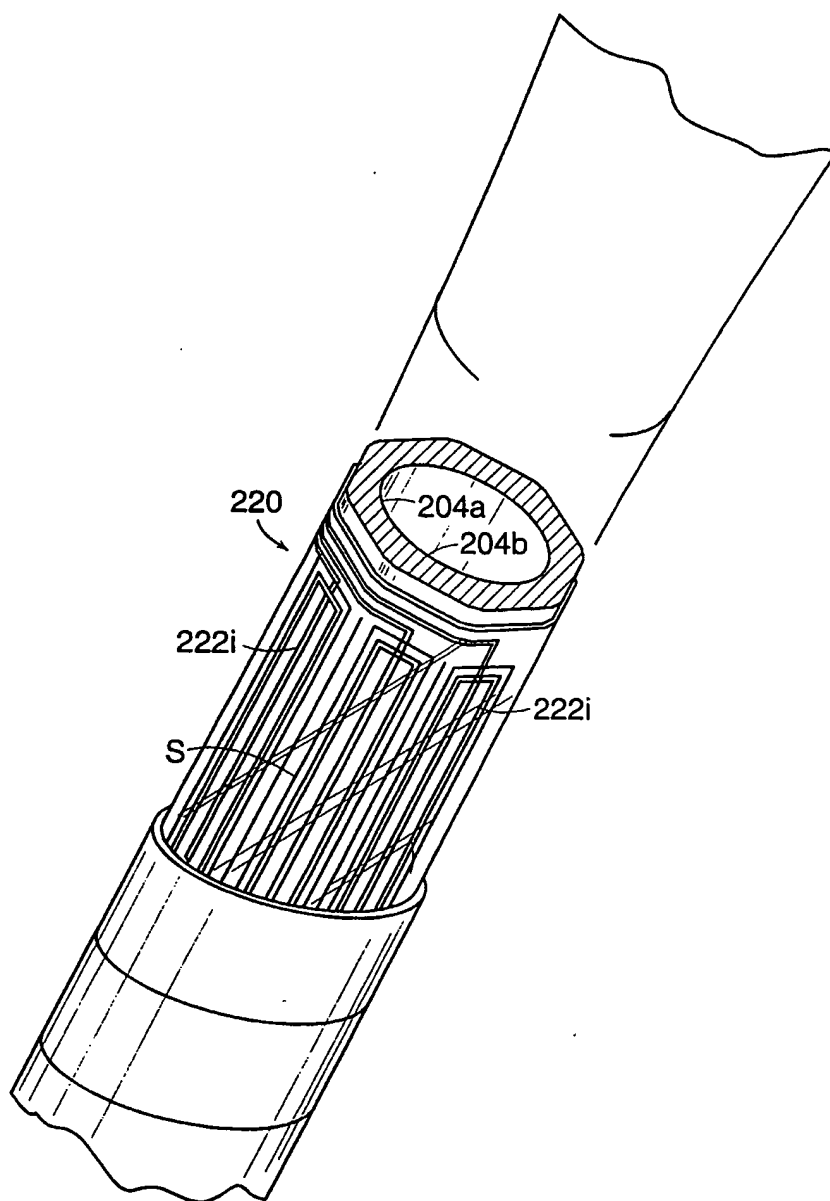


FIG. 14A

17/17

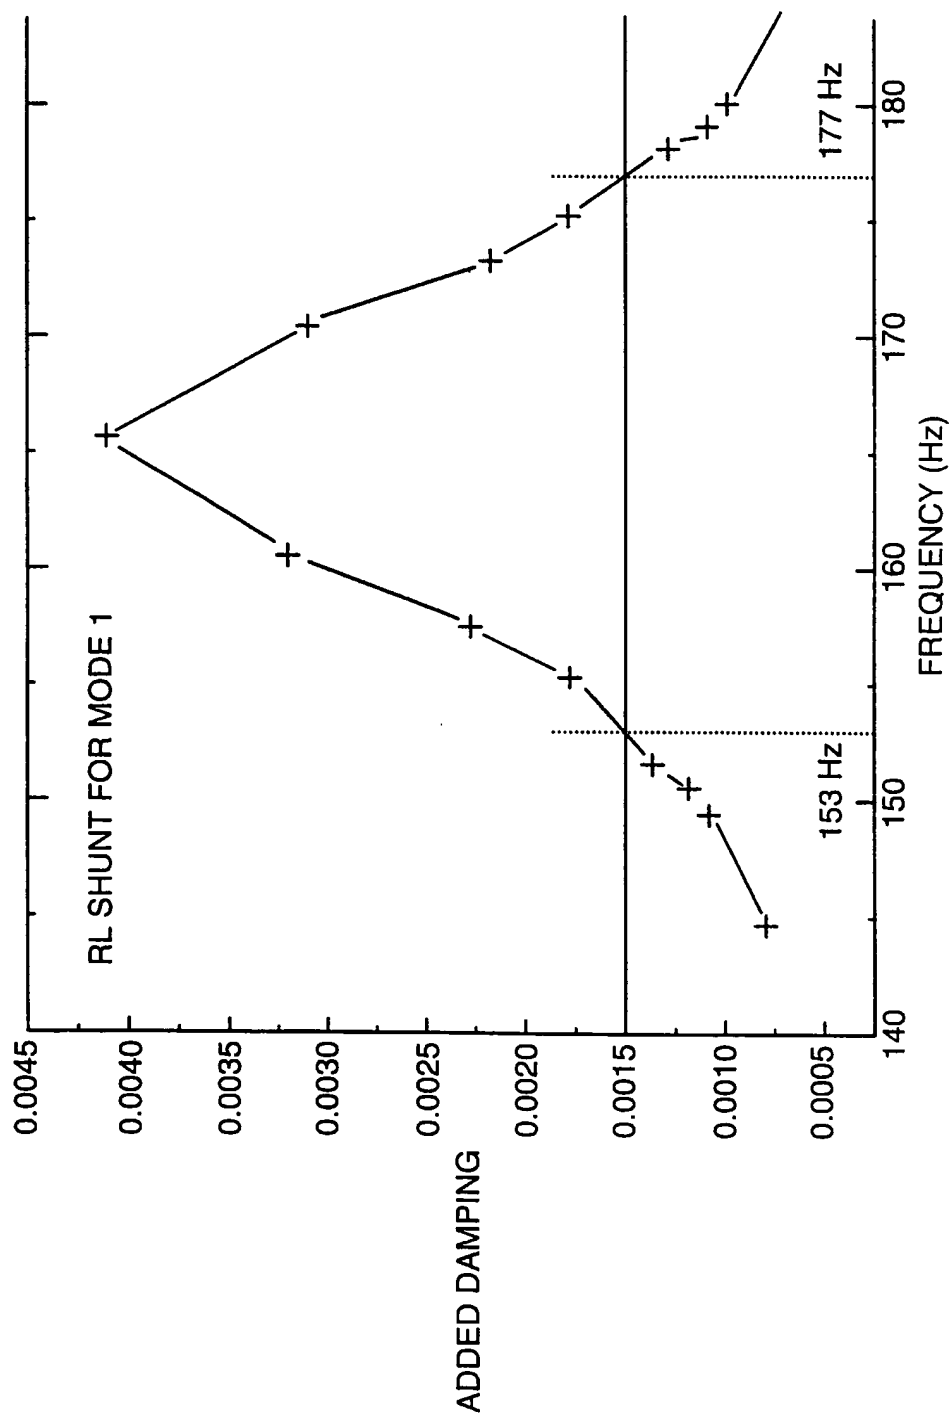


FIG. 15